



Level



Pressure



Flow



Temperature

Liquid
Analysis

Registration

Systems
Components

Services




Solutions

Temperature transmitter

iTEMP[®] HART[®] DIN rail TMT122

Universal temperature transmitter for resistance thermometers (RTD), thermocouples, resistance and voltage transmitters, incorporating HART[®] protocol

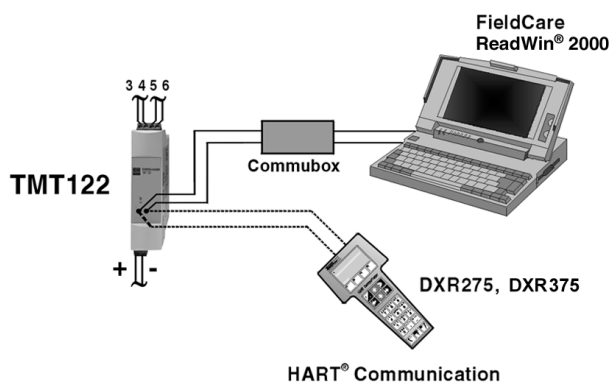

Application areas

- Temperature transmitter with HART[®] protocol for converting various input signals into a scalable 4 to 20 mA analogue output signal
- Input:
 - Resistance thermometer (RTD)
 - Thermocouple (TC)
 - Resistance transmitter (Ω)
 - Voltage transmitter (mV)
- HART[®] protocol for front end unit or panel unit operation using the hand operating module (DXR275, DXR375) or PC (e.g. ReadWin[®] 2000 or FieldCare)
- Installation on DIN rail according to IEC 60715

Ex-Certification:

- ATEX Ex ia
- CSA IS
- FM IS
- Ship building approval GL
- Galvanic isolation
- Output simulation
- Min./max. process value indicator function
- Customer-specific linearisation
- Linearisation curve match
- Customer-specific measurement range settings or expanded SETUP (see Questionnaire, page 7)

Features and benefits

- Universal settings with HART[®] protocol for various input signals
- 2-wire technology, 4 to 20 mA analogue output
- High accuracy in total ambient temperature range
- Fault signal on sensor break or short circuit, presettable to NAMUR NE 43
- EMC to NAMUR NE 21, CE
- UL recognized component to UL 3111-1



Operation and system construction

Measurement principle	Electronic measurement and conversion of input signals in industrial temperature measurement.
Measurement system	The iTEMP® HART® DIN rail TMT122 temperature transmitter is a 2-wire transmitter with an analogue output. It has measurement input for resistance thermometers (RTD) in 2-, 3- or 4-wire connection, thermocouples and voltage transmitters. Setting up of the TMT122 is done using the HART® protocol with hand operating module (DXR275, DXR375) or PC (e.g. configuration software ReadWin® 2000 or FieldCare).

Input

Measured variable	Temperature (temperature linear), resistance and voltage.
Measuring range	Depending upon the sensor connection and input signal. The transmitter evaluates a number of different measurement ranges.

Type of input

	Type	Measurement ranges	Min. measurement range
<i>Resistance thermometer (RTD)</i>	Pt100 Pt500 Pt1000 acc. to IEC 751 ($\alpha = 0.00835$) Pt100 acc. to JIS C 1604-81 ($\alpha = 0.003916$)	-200 to 850 °C (-328 to 1562 °F) -200 to 250 °C (-328 to 482 °F) -200 to 250 °C (-238 to 482 °F) -200 to 649 °C (-328 to 1200 °F)	10 K 10 K 10 K 10 K
	Ni100 Ni500 Ni1000 acc. to DIN 43760 ($\alpha = 0.006180$)	-60 to 250 °C (-76 to 482 °F) -60 to 150 °C (-76 to 302 °F) -60 to 150 °C (-76 to 302 °F)	10 K 10 K 10 K
	■ Connection type: 2-, 3- or 4-wire connection ■ Software compensation of cable resistance possible in the 2-wire system (0 to 30 Ω) ■ Sensor cable resistance max. 40 Ω per cable ■ Sensor current: ≤ 0.2 mA		
	<i>Resistance transmitter</i>	Resistance Ω 10 to 400 Ω 10 to 2000 Ω	10 Ω 100 Ω
<i>Thermocouples (TC)</i>	B (PtRh30-PtRh6) C (W5Re-W26Re) ^a D (W3Re-W25Re) ^a E (NiCr-CuNi) J (Fe-CuNi) K (NiCr-Ni) L (Fe-CuNi) ^b N (NiCrSi-NiSi) R (PtRh13-Pt) S (PtRh10-Pt) T (Cu-CuNi) U (Cu-CuNi) ^b	0 to +1820 °C (32 to 3308 °F) 0 to +2320 °C (32 to 4208 °F) 0 to +2495 °C (32 to 4523 °F) -270 to +1000 °C (-454 to 1832 °F) -210 to +1200 °C (-346 to 2192 °F) -270 to +1372 °C (-454 to 2501 °F) -200 to +900 °C (-328 to 1652 °F) -270 to +1300 °C (-454 to 2372 °F) -50 to +1768 °C (-58 to 3214 °F) -50 to +1768 °C (-58 to 3214 °F) -270 to +400 °C (-454 to 752 °F) -200 to +600 °C (-328 to 1112 °F)	500 K 500 K 500 K 50 K 50 K 50 K 50 K 50 K 500 K 500 K 50 K 50 K
	■ Cold junction internal (Pt100) ■ Cold junction accuracy: ± 1 K		
<i>Voltage transmitters</i>	Millivolt transmitter	-10 to 75 mV	5 mV

a. According to ASTM E988


b. According to DIN IEC 584 part 1

Output

Output signal	Analogue 4 to 20 mA, 20 to 4 mA
Signal on alarm	■ Measurement range undercut: Linear drop to 3.8 mA ■ Exceeding measurement range: Linear rise to 20.5 mA ■ Sensor breakage; Sensor short circuit¹: ≤ 3.6 mA or ≥ 21.0 mA (if setting ≥ 21.0 mA the output is > 21.5 mA)
Load	Max. $(V_{\text{Power supply}} - 12 \text{ V}) / 0.022 \text{ A}$ (Current output)
Linearisation / transmission behaviour	Temperature linear, resistance linear, voltage linear
Filter	Digital filter 1. degree: 0 to 100 s
Galvanic isolation	U = 2 kV AC (Input/output)
min. current consumption	≤ 3.5 mA
Current limit	≤ 23 mA
Switch on delay	4 s (during power up $I_a \approx 3.8 \text{ mA}$)

Auxiliary energy

Electrical connection

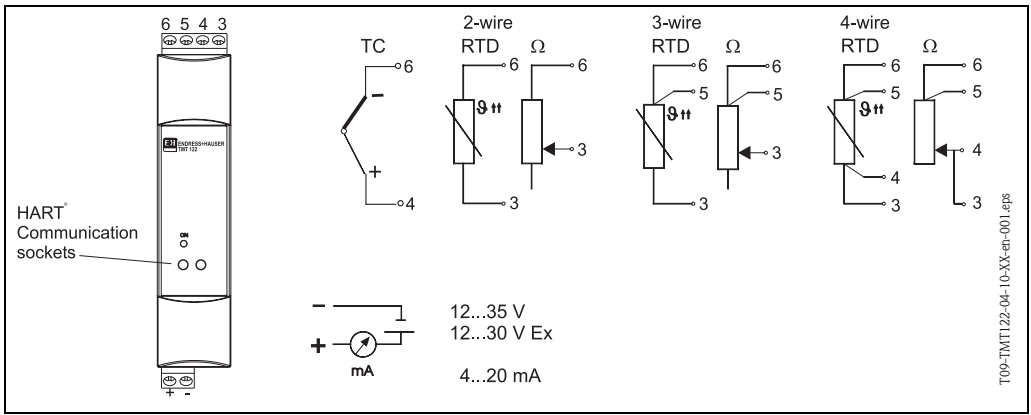

Temperature transmitter terminal connections

For the unit operation via HART[®] communication sockets a minimum load resistance of 250 Ω is necessary in the signal circuit!

Power supply	$U_b = 12 \text{ to } 35 \text{ V}$, polarity protected
Residual ripple	Allowable ripple $U_{ss} \leq 3 \text{ V}$ at $U_b \geq 15 \text{ V}$, $f_{\text{max.}} = 1 \text{ kHz}$

1. Not for thermocouple

Performance characteristics

Response time 1 s

Reference operating conditions Calibration temperature: +23 °C ± 5 K (73.4 °F ± 9 °F)

Maximum measured error

	Type	Measurement accuracy ³
Resistance thermometer RTD	Pt100, Ni100 Pt500, Ni500 Pt1000, Ni1000	0.2 K (0.36 °F) or 0.08% 0.5 K (0.9 °F) or 0.20% 0.3 K (0.54 °F) or 0.12%
Thermocouple TC	K, J, T, E, L, U N, C, D S, B, R	typ. 0.5 K (0.9 °F) or 0.08% typ. 1.0 K (1.8 °F) or 0.08% typ. 2.0 K (3.6 °F) or 0.08%
	Measurement range	Measurement accuracy ³
Resistance transmitter (Ω)	10 to 400 Ω 10 to 2000 Ω	± 0.1 Ω or 0.08% ± 1.5 Ω or 0.12%
Voltage transmitter (mV)	-10 to 75 mV	± 20 μV or 0.08%

Influence of power supply ≤ ± 0.01%/V deviation from 24 V¹

Influence of ambient temperature (temperature drift)

- Resistance thermometer (RTD):
 $T_d = \pm (15 \text{ ppm/K} * \text{max. meas. range} + 50 \text{ ppm/K} * \text{preset meas. range}) * \Delta \vartheta$
- Resistance thermometer Pt100:
 $T_d = \pm (15 \text{ ppm/K} * (\text{range end value} + 200) + 50 \text{ ppm/K} * \text{preset meas. range}) * \Delta \vartheta$
- Thermocouple (TC):
 $T_d = \pm (50 \text{ ppm/K} * \text{max. meas. range} + 50 \text{ ppm/K} * \text{preset meas. range}) * \Delta \vartheta$

$\Delta \vartheta$ = Deviation of the ambient temperature according to the reference condition (+23 °C ± 5 K or 73.4 °F ± 9 °F).

Long term stability ≤ 0.1K/Year² or ≤ 0.05%/Year^{2,3}

Influence of load ≤ ±0.02%/100 Ω¹

Influence of cold junction Pt100 DIN IEC 751 Cl. B (internal reference junction for thermocouples TC)

Installation conditions

Installation instructions **Orientation**
No limit


1. All data is related to a measurement end value
2. According to reference conditions
3. % is related to the adjusted measurement range (the value to be applied is the greater one).

Environment conditions

Ambient temperature range	Preferably reference conditions
Ambient temperature limits	−40 to +85 °C (−40 to +185 °F) for Ex-area, see Ex-certification
Storage temperature	−40 to +100 °C (−40 to +212 °F)
Climate class	According to EN 60 654-1 (IEC 60654-1), Class C
Ingress protection	IP 20
Electromagnetic compatibility (EMC)	Interference immunity and interference emission according to EN 61 326-1 (IEC 1326) and NAMUR NE 21
Condensation	Permitted
Shock and vibration resistance	4g / 2 to 150 Hz as per IEC 60 068-2-6

Mechanical construction

Design, dimensions

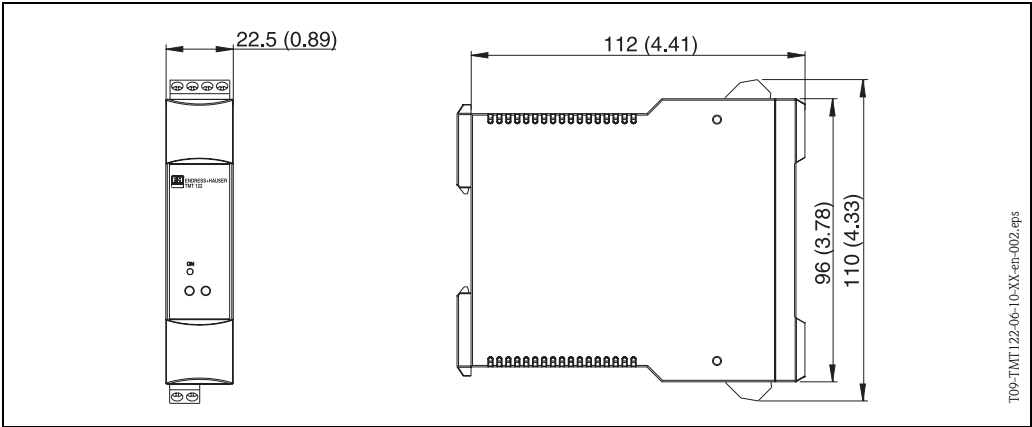

Housing for DIN rail mounting according to IEC 60715; Dimensions in mm (inches)

Weight	Approx. 90 g (3.2 oz)
Material	Housing: Plastic PC/ABS, UL 94V0
Terminals	Keyed plug-in screw terminals, core size max. 2.5 mm ² (16 AWG) solid, or strands with ferrules

Human interface

Display elements	A yellow illuminated LED signalizes: Device is operational. With the PC software ReadWin [®] 2000 or FieldCare the current measured value can be displayed.
Operating elements	At the temperature transmitter no operating elements are available directly. The temperature transmitter will be configured by remote operation with the PC software ReadWin [®] 2000 or FieldCare.
Remote operation	Configuration Hand operating module DXR275, DXR375 or PC with Commubox FXA191 and operating software (ReadWin[®] 2000 or FieldCare). Interface PC interface RS232 and Commubox FXA191. Configurable parameters Sensor type and connection type, engineering units (°C/°F), measurement range, internal/external cold junction compensation, cable resistance compensation on 2-wire connection, fault conditioning, output signal (4 to 20/20 to 4 mA), digital filter (damping), offset, measurement point identification + descriptor (8 + 16 characters), output simulation, customer specific linearisation, min./max. process value indicator function.

Certificates and approvals

Ex approval	For further details on the available Ex versions (ATEX, CSA, FM, etc.), please contact your nearest E+H sales organisation. All relevant data for hazardous areas can be found in separate Ex documentation. If required, please request copies from us or your E+H sales organisation.
CE approval	The measurement system fulfils the requirements demanded by the EU regulations. Endress+Hauser acknowledges successful unit testing by adding the CE mark.
Other standards and guidelines	■ EN 60529 (IEC 60529): Degrees of protection by housing (IP code) ■ EN 61010 (IEC 61010): 'Safety requirements for electrical measurement, control and laboratory instrumentation'. ■ EN 61326 (IEC 1326): Electromagnetic compatibility (EMC requirements)

Ordering information

Questionnaire

Questionnaire Endress+Hauser iTEMP temperature transmitter Customer specific setup / Kundenspezifische Einstellung														
Standard setup / Standardeinstellung														
Sensor	TC	() B	() C	() D	() E	() J								
		() K	() L	() N	() R	() S								
		() T	() U											
	RTD	() Pt100		() Pt500		() Pt1000								
		() Ni100		() Ni500		() Ni1000								
		() 2 wire		() 3 wire		() 4 wire								
Unit / Einheit		() °C		() °F										
Range / Messbereich (not / nicht PROFIBUS-PA)	Low scale Anfang													
	High scale Ende													
												Bitte beachten! Messbereich und min. Spanne (s. Techn. Daten)		
												Note! Range and min. span (s. Techn. data)		
Bus address / Busadresse (only / nur PROFIBUS-PA)														
												[0...126]		
Expanded setup / Erweiterte Einstellung														
Reference junction / Vergleichsstelle	() intern	() extern		(only / nur TC)										
					[0...80°C; 32...176°F]									
Compensation wire resistance / Kompensation Leitungswiderstand					[0...20 Ohm]		(only / nur RTD 2 wire)							
					[0...30 Ohm]		(only / nur HART, PA RTD 2 wire)							
Failure mode / Fehlerverhalten	() ≤ 3.6 mA	() ≥ 21.0 mA		(not / nicht PROFIBUS-PA)										
Output / Ausgang	() 4...20 mA	() 20...4 mA		(not / nicht PROFIBUS-PA)										
Filter					[0, 1, 2,..., 8s]		(only / nur PCP)							
					[0, 1, 2,..., 100s]									
Offset														
												[-9.9... 0...+9.9K]		
TAG	PCP													
	HART	(HART: 8 char. TAG + 16 char. Descriptor , PROFIBUS-PA: 32 char.)												
PROFIBUS-PA														

People for Process Automation

Product structure

Certification				
	A	Version for non Ex areas		
	B	ATEX II 2(1) G EEx ia IIC T4/T5/T6		
	C	FM IS, Class I, Div. 1+2, Group A, B, C, D		
	D	CSA IS, Class I, Div. 1+2, Group A, B, C, D		
	E	ATEX II3G EEx nA IIC T4/T5/T6		
	I	FM+CSA IS, NI, Class I, Div. 1+2, Group A, B, C, D		
	J	CSA General Purpose		
Configuration transmitter connection				
	A	Standard factory configuration		
	1	Configuration connection TC		
	2	Configuration connection RTD 2-wire		
	3	Configuration connection RTD 3-wire		
	4	Configuration connection RTD 4-wire		
Configuration temperature sensor				
	A	Standard factory configuration		
	B	Config. Typ B	(0 to 1820 °C	min. span 500 K)
	C	Config. Typ C	(0 to 2320 °C	min. span 500 K)
	D	Config. Typ D	(0 to 2495 °C	min. span 500 K)
	E	Config. Typ E	(-200 to 1000 °C	min. span 50 K)
	J	Config. Typ J	(-200 to 1200 °C	min. span 50 K)
	K	Config. Typ K	(-200 to 1372 °C	min. span 50 K)
	L	Config. Typ L	(-200 to 900 °C	min. span 50 K)
	N	Config. Typ N	(-270 to 1300 °C	min. span 50 K)
	R	Config. Typ R	(-0 to 1768 °C	min. span 500 K)
	S	Config. Typ S	(-0 to 1768°C	min. span 500 K)
	T	Config. Typ T	(-200 to 400 °C	min. span 50 K)
	U	Config. Typ U	(-200 to 600 °C	min. span 50 K)
	1	Config. Pt100 acc. to IEC751	(-200 to 850 °C	min. span 10 K)
	2	Config. Ni100	(-60 to 180 °C	min. span 10 K)
	3	Config. Pt500	(-200 to 250 °C	min. span 10 K)
	4	Config. Ni500	(-60 to 150 °C	min. span 10 K)
	5	Config. Pt1000	(-200 to 250 °C	min. span 10 K)
	6	Config. Ni100	(-60 to 150 °C	min. span 10 K)
	9	Config. Pt100 acc. to JIS C1604-81	(-200 to 649 °C	min. span 10 K)
Setup				
	A	Standard factory configuration (Pt100/3-wire/0 to 100 °C)		
	B	Customised measurement range		
	C	Customised expanded configuration for TC (see questionnaire)		
	D	Customised expanded configuration for RTD (see questionnaire)		
Model				
	A	Standard model		
	B	Works calibration certificate 6 test points		
TMT122-				⇐ Order code

Accessories

Commubox FXA191, PC operating software ReadWin® 2000 or FieldCare

Further Documentation

- Compact manual 'iTEMP[®] HART[®] DIN rail TMT122' (KA128R/09/a3)
- Operating manual 'iTEMP[®] HART[®] Communication' (BA139R/09/a3)
- Additional documentation ATEX:
 - ATEX II2(1)G (XA016R/09/a3)
 - ATEX II3G (XA019R/09/a3)

The operating software ReadWin[®] 2000 can be downloaded free of charge from the Internet from the following address:

www.endress.com/Readwin

Subject to modification

International Head Quarter

Endress+Hauser
GmbH+Co. KG
Instruments International
Colmarer Str. 6
79576 Weil am Rhein
Germany

Tel. +49 76 21 9 75 02
Fax +49 76 21 9 75 34 5
www.endress.com
info@ii.endress.com

Endress+Hauser 
People for Process Automation