

Assemblies for oxygen sensor

COS 3/COS 3S

COA 110

Oxygen measurement in immersion operation



Areas of application

The immersion assemblies COA 110 are designed to hold the oxygen sensors COS 3 and COS 3S.

The COA 110-40 version together with the universal suspension assembly holder CYH 101-A serves as a complete installation system for measuring transmitter and sensor and is particularly suitable for measurements in open basins or tanks (e.g. activated sludge basin in a sewage treatment plant).

The COA 110-50 version enables oxygen measurement in lakes, rivers or basins with considerable fluctuations of the water level.


Benefits at a glance

- The immersion tube and sensor have the same outside diameter. Once the sensor is attached, the immersion tube and sensor form a single ridgeless unit effectively preventing dirt accumulation on the sensor.
- All assemblies are designed so that water motion causes a slight oscillating movement of the immersion tube. This results in an additional cleaning effect on the sensor membrane surface.

Dimensions

Immersion holder
COA 110-40 with
OHL-B attachment


- 1 Glued
- 3 Lead pipe for
stabilization
- 4 R1"-internal thread
for COS 3 or
COS 3-S sensor

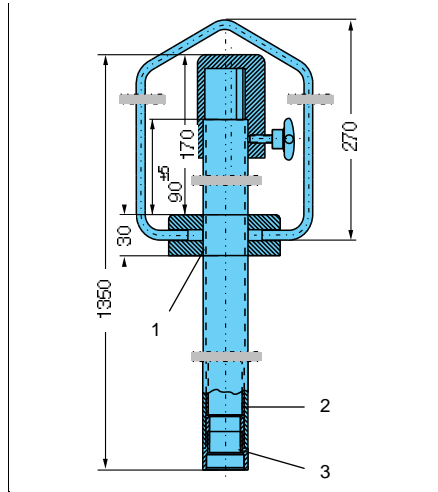

COA 110-40

The immersion assembly COA 110-40 is attached to the universal suspension assembly holder (transverse pipe) with the stainless steel mounting bracket and a plastic chain. The height can be adapted to the local conditions by selecting the appropriate chain position. The integrated lead pipe secures the assembly in the vertical installation position. The sensor can be easily removed for cleaning, air calibration or general control.

- 1 Cable strain relief
- 2 Cable outlet and
rain protection
- 3 Fixing ring with
clamping screw
- 4 Eyelets Ø 15; 3 x 120°
for attachment of
fastening strings
- 5 Salt water-resistant
plastic float
- 6 Stainless steel pipe
40 x 1
Material 1.4571
- 7 R 1"- internal thread
for COS 3 sensor
- 8 „Shock absorber“
weight for
stabilization
- 9 Oxygen sensor
COS 3

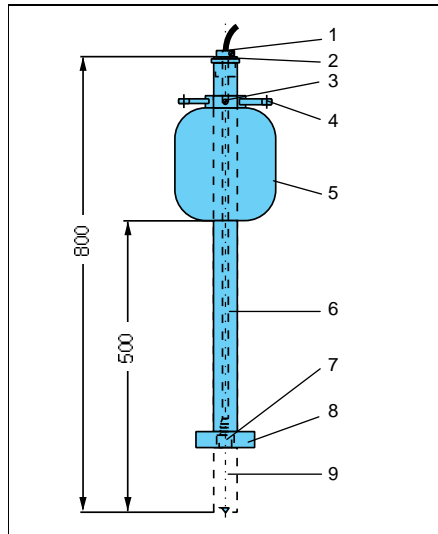

COA 110-50

The COA 110-50 float assembly consists of the float body made of salt water-resistant polyurethane foam. The immersion pipe (65 cm long) with R1" thread holds the COS 3 sensor.

Three eyelets are arranged in an angle of 120° (attached on the fixing ring above the body) for attachment of fastening strings.

An additional weight on the lower end increases the lateral stability and serves as a shock absorber. The pendulum motion of the immersion pipe has a cleaning effect on the sensor membrane. The immersion depth of the sensor tip is approx. 60 cm below the water level.

How to order

O₂ assembly COA 110

Version

40 PVC 1.30 m + mounting bracket V4A
50 V4A 0.65 cm / PUR floating body

COA 110 –

← complete order code

Accessories

Supplementary documentation

- Mounting bracket V4A Order no. 50016475
- OP baffle plate, protection under extreme flow conditions Order no. 50028712
- ☐ Sensor for dissolved oxygen COS 3/COS 3S TI 065C/07/e
- ☐ Universal suspension assembly holder CYH 101 TI 092C/07/e
- ☐ Dissolved O₂ measurement Mycom COM 121/151 TI 024C/07/e

Export Division

Endress+Hauser GmbH+Co.
Instruments International
P.O. Box 22 22
D-79574 Weil am Rhein
Tel. (0 76 21) 9 75 - 02
Fax (0 76 21) 97 53 45

Endress+Hauser
Nothing beats know-how

