


# Industrial thermowell *omnigrad TA560*

**Heavy duty - General purpose**  
**From hexagonal bar stock**  
**3/4" NPT threaded process connection**



Straight



Conical

## Description

TA560 is an industry standard thermowell, manufactured from hexagonal bar stock. The process connection is threaded. The thermowell stem shape can be straight or conical. The extension and the immersion lengths can be chosen according to process requirements. A wide choice of standard diameters and materials is available; other versions can be ordered according to specification. Different grades of surface finishing are also available.

## Application

TA560 is designed for use with resistance and thermocouple thermometers mainly in heavy duty applications.

## Technical data

### Hexagonal bar

Wrench: 27 mm  
O.D.: ≤ 22 mm  
Standard bore diameter: 6.5 mm or 10 mm  
Material: AISI 304, AISI 316 Ti, AISI 316, AISI 316 L

### Connection to thermometer

Threaded: 1/2" NPT - female

### Process connection

Threaded: 3/4" NPT

### Tip

Bottom shape: straight or conical  
Bottom thickness: 6.35 mm

### Surface

Finishing: 0.8 micron - standard  
0.2 micron

Quality made by  
Endress+Hauser




ISO 9001

**Endress+Hauser**  
Nothing beats know-how



Order key

TA560- Heavy duty thermowell - General purpose - From hexagonal bar stock  
3/4" NPT threaded process connection

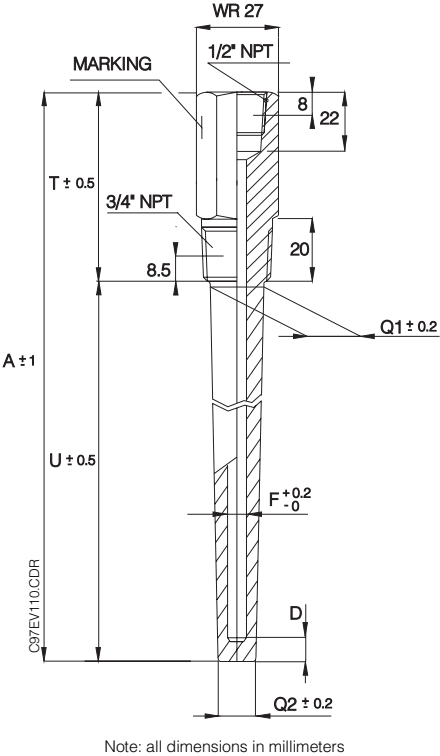

Extension Length T (45 ÷ 150 mm)

- A - 45 mm (1 3/4")
- B - 70 mm (2 3/4")
- C - 95 mm (3 3/4")
- 1 - 50 mm
- 2 - 60 mm
- 3 - 75 mm
- 4 - 110 mm
- Y - ..... mm length to specification

Outside diameter Q1 \ Outside diameter Q2

- A - Q1 = 22 mm (7/8") \ Q2 = 16 mm (5/8")
- B - Q1 = 19.5 mm (49/64") \ Q2 = 19.5 mm (49/64") (\*)
- C - Q1 = 22 mm (7/8") \ Q2 = 19.5 mm (49/64") (\*)
- 1 - Q1 = 16 mm \ Q2 = 16 mm (\*)
- 2 - Q1 = 20 mm \ Q2 = 16 mm (\*)
- Y - Q1 = ..... mm (Q1 max = 22 mm) \ Q2 = ..... mm (to specification) (1)

Immersion Length U (50 ÷ 850 mm)

- UC - 63.5 mm (2 1/2")
- UD - 114.5 mm (4 1/2")
- UE - 190.5 mm (7 1/2")
- UF - 266.5 mm (10 1/2")
- UG - 343 mm (13 1/2")
- UH - 419 mm (16 1/2")
- UJ - 495.5 mm (19 1/2")
- UK - 571.5 mm (22 1/2")
- YY - ..... mm length to specification

Material of Nominal Length A (U+T)

- A - AISI 304 / W.1.4301
- B - AISI 316 Ti / W.1.4571
- C - AISI 316 / W.1.4401
- D - AISI 316 L / W.1.4404
- Y - Material to specification

Finishing of Immersion Length U

- 1 - 0.8 micron - standard
- 2 - 0.2 micron

Bore diameter F \ Bottom thickness D

- 3 - F = 6.5 mm \ D = 6.35 mm
- 5 - F = 10 mm \ D = 6.35 mm (2)
- 9 - F = ..... mm \ D = ..... mm to specification (1)

Plug and chain

- A - Without plug and chain
- B - AISI 304 plug and chain

Markings

- 0 - None
- 1 - Punched on

TA560-										Complete Order Code
--------	--	--	--	--	--	--	--	--	--	---------------------

Note (1): Wall thickness 3 mm minimum  
(Q2 - F) / 2 ≥ 3 mm  
Note (2): Only for positions (\*)

Supplementary documentation

- ☐ Industrial protecting tubes
- Technical Information TI138T/02/en

Export Division

Endress+Hauser  
Instruments International  
GmbH + Co.  
P.O. Box 2222  
D-79574 Weil am Rhein  
Germany  
Tel. (7621) 975-02  
Tx 7-73-926  
Fax (7621) 9-75-345

Endress+Hauser  
Nothing beats know-how

