



Level



Pressure



Flow



Temperature



Liquid
Analysis



Registration



Systems
Components



Services



Solutions

Technical Information

Liquiphant T FTL20

Level limit switch

Level limit switch for liquids



Application

The Liquiphant T FTL20 is a level limit switch for all kinds of fluids and is used in tanks, containers and pipelines. It is used in cleaning and filtering systems and coolant and lubricant tanks as an overspill protection or as a pump protector.

The FTL20 is ideal for applications which previously used float switches and conductive, capacitive and optical sensors.

It also works in applications which are unsuitable for these measuring methods due to conductivity, build-ups, turbulence, flows or air bubbles.

The FTL20 is not suitable for hazardous areas and areas where the medium temperature is above 150 °C.

For hygienic areas the use of FTL20H is recommended.

Your benefits

- Operational safety, reliability and universal applicability through use of the tuning fork measuring principle
- External test option using test magnet
- On-site control using external LED display
- Easy to install even at points difficult to access due to compact construction
- Rugged stainless steel housing (316L)
- Service-friendly plug-in connections
- For medium temperatures up to 150 °C

Table of contents

Function and system design	3
Measuring principle	3
Measuring system	3
Input	4
Measured variable	4
Measuring range	4
Output	4
Switching outputs	4
Operating modes for variants AC and DC-PNP	4
Power supply	5
Cable entry	5
Electrical connection	5
Performance characteristics	8
Switching delay	8
Reference operating conditions	8
Measured value resolution	8
Measuring frequency	8
Maximum measured error	8
Repeatability	8
Hysteresis	8
Settling time	8
Influence of ambient temperature	8
Influence of medium temperature	8
Influence of medium pressure	8
Operating conditions: Installation instructions	8
Orientation	8
Connecting cable	9
Operating conditions: Environment	9
Ambient temperature range	9
Ambient temperature limits for 150 °C variant	9
Ambient temperature limits for 100 °C variant	9
Storage temperature	9
Degree of protection	9
Shock resistance	9
Vibration resistance	9
Electromagnetic compatibility	9
Overvoltage protection	9
Operating conditions: Process	9
Medium temperature range for 150 °C variant	9
Medium temperature range for 100 °C variant	9
Process pressure	9
State of aggregation	9
Density	9
Viscosity	9
Gas content	9
Solids content $\varnothing$	9

Mechanical construction	10
Design, dimensions of the 150 °C variant	10
Design, dimensions of the 100 °C variant	11
Process connections	11
Weight (150 °C variant)	13
Weight (100 °C variant)	13
Materials	13
Housing	13
Terminals	13
Human interface	13
Function test with test magnet	13
Light signals	14
Certificates and approvals	16
CE approval	16
Sanitary compatibility	16
Overfill protection	16
Marine approval	16
Other standards and guidelines	16
Ordering information	16
Liquiphant T FTL20	16
Accessories	17
Socket wrench	17
Welding boss G $\frac{3}{4}$	17
Welding boss G 1	17
Cable	17
Supplementary documentation	18
Operating Instructions	18
Certificates	18

Function and system design

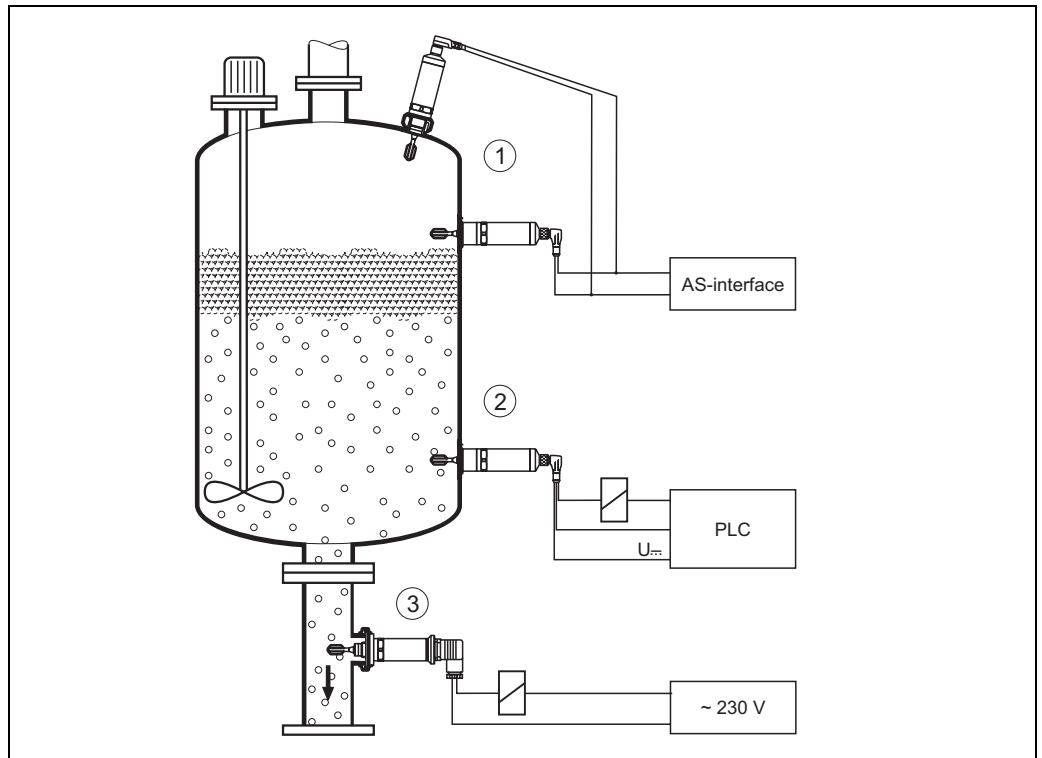
Measuring principle

The tuning fork of the FTL20 is brought to its resonance frequency by means of a piezoelectric drive. If the tuning fork is covered by liquid, this frequency changes. The electronics of the FTL20 monitor the resonance frequency and indicate whether the tuning fork is freely vibrating or is covered by liquid.

Measuring system

The measuring system comprises:

- Liquiphant T FTL20 limit switch
- Programmable logic control (PLC), miniature contactor, solenoid valve or AS-i bus



L00-FTL20Hxx-14-05-xx-en-001

Example 1): Overfill protection or top level detection

Example 2): Lower level detection or dry running protection

Example 3): Dry running protection for pump

Input

Measured variable	Density
Measuring range	> 0.7 g/cm ³ other density settings on request, e.g. 0.5 g/cm ³

Output

Switching outputs

	DC-PNP valve connector	DC-PNP M 12x1	AC 2-wire	AS-i
Function	Positive voltage signal at the switch output of the electronics (PNP)		Switching the power supply line	Switching the D0 bit
Switch behaviour	ON/OFF			0 / 1 (free / covered)
Relay switching capacity	250 mA			D0 bit
Fail-safe mode	MIN/MAX (see below)			D1 bit D1: 0 error
Switching delay	approx. 0.5 s on coverage / approx. 1.0 s on tuning fork becoming uncovered other switching time on request			
Switching threshold	with vertical orientation: 13.0 mm from top of fork with horizontal orientation: 3.5 mm from fork centre			
Hysteresis	3 ±0.5 mm			

Operating modes for variants AC and DC-PNP

The FTL20 can be connected in two operating modes. By choosing the suitable operating mode (MAX or MIN safety), you ensure that the FTL20 switches safely even in the event of a fault (e.g. if the power supply line is disconnected).

MAX - maximum safety

- The FTL20 keeps the electronic switch closed as long as the liquid level is below the fork.
- Example of an application: overflow protection



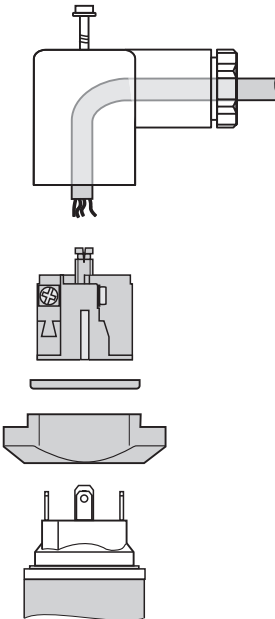
MIN - minimum safety

- The FTL20 keeps the electronic switch closed as long as the fork is immersed in liquid.
- Example of an application: dry running protection for pumps

The electronic switch opens if the limit is reached, if a fault occurs or the power fails.

Power supply

Cable entry



Pg 11 / ½ NPT / QUICKON

M 12x1 *
(Plastic)

*** Accessories**
4 x 0.34 M 12 elbowed (order number: 52010285)









L00-FTL20xxx-04-05-xx-xx-001

Electrical connection





Variant DC-PNP (direct current) M 12x1 connector

Voltage source: shock-protected voltage or Class 2 circuit (North America)





Suitable for use in non-equivalent operation:
When both outputs are connected, the MIN and MAX outputs take on opposite states in trouble-free operation. In the event of an alarm condition or a line break, both electronic switches are open. In addition to level monitoring, function-dependent sensor monitoring can also be performed with the aid of 2-channel evaluation.

 Operating mode MAX (NC contact)	 Operating mode MIN (NO contact)
     L00-FTL20xxx-04-05-xx-xx-002	     L00-FTL20xxx-04-05-xx-xx-003
   L00-FTL20xxx-04-05-xx-xx-009	   L00-FTL20xxx-04-05-xx-xx-010

Variant DC-PNP (direct current) valve connector

 Operating mode MAX (NC contact)	 Operating mode MIN (NO contact)
 L00-FTL20xxx-04-05-xx-xx-004	 L00-FTL20xxx-04-05-xx-xx-005
 L00-FTL20xxx-04-05-xx-xx-011	 L00-FTL20xxx-04-05-xx-xx-012


Variant AC (alternating current) valve connector

 Operating mode MAX	 Operating mode MIN
 L00-FTL20xxx-04-05-xx-xx-006	 L00-FTL20xxx-04-05-xx-xx-007
 L00-FTL20xxx-04-05-xx-xx-013	 L00-FTL20xxx-04-05-xx-xx-014

**Note!**

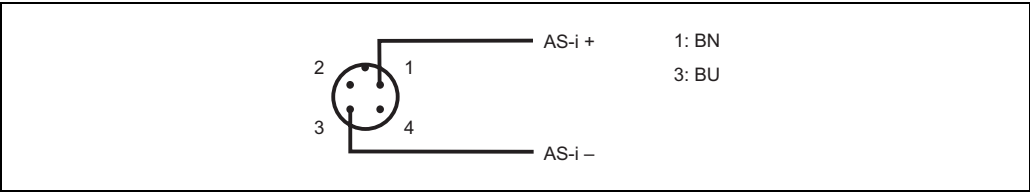Approved for relays with a holding power/rated power $> 2.5 \text{ VA}$ (253 V) or $> 0.5 \text{ VA}$ (24 V).
Relays with lower holding power/rated power can be operated via a parallel-connected RC-element (option).

Connect AS-i bus



100-FTL20xxx-04-05-xx-xx-008

Programming instructions for the AS-i

AS-i profile: S-3.A.1

The address is defaulted to 0 (HEX). It is changeable via the bus master or programming unit.

Data bit:

D0:1 Sensor covered	D1:1 Status = O.K.
D0:0 Sensor free	D1:0 Status = error
D2 and D3 are not used.	

Parameter bits (P0...P3) are not used.


Electrical connection	DC-PNP valve connector	DC-PNP M 12x1	AC 2 wire	AS-i
Supply voltage	10...35 V DC	10...35 V DC	19...253 V AC	24.5...31 V DC
Cable entry	Pg 11 / ½ NPT	M 12x1	Pg 11 / ½ NPT	M 12x1
Cable specification	Max 1.5 mm ² and ø 3.5...6.5	IEC 60947-5-2	Max 1.5 mm ² and ø 3.5...6.5	IEC 62026-2
Power consumption	< 825 mW	< 825 mW	< 810 mW	< 825 mW
Current consumption	< 15 mA	< 15 mA	< 3.8 mA	< 25 mA
Residual ripple	5 Vss at 0...400 Hz	5 Vss at 0...400 Hz	—	—

Performance characteristics

Switching delay	0.5 s when covering 1.0 s when becoming free other switching time on request
Reference operating conditions	Ambient temperature: 23 °C Process pressure: 1 bar Medium: water Medium density: 1 Medium temperature: 23 °C Installation from above /vertical Density setting: > 0.7
Measured value resolution	< 0.5 mm
Measuring frequency	Approx. 1100 Hz in air
Maximum measured error	13.0 ±1 mm
Repeatability	±0.5 mm
Hysteresis	3.0 ±0.5 mm
Settling time	< 2 s
Influence of ambient temperature	Negligible
Influence of medium temperature	$-29.6 \times 10^{-3} \text{ mm/}^{\circ}\text{C}$
Influence of medium pressure	$-55.2 \times 10^{-3} \text{ mm/bar}$

Operating conditions: Installation instructions

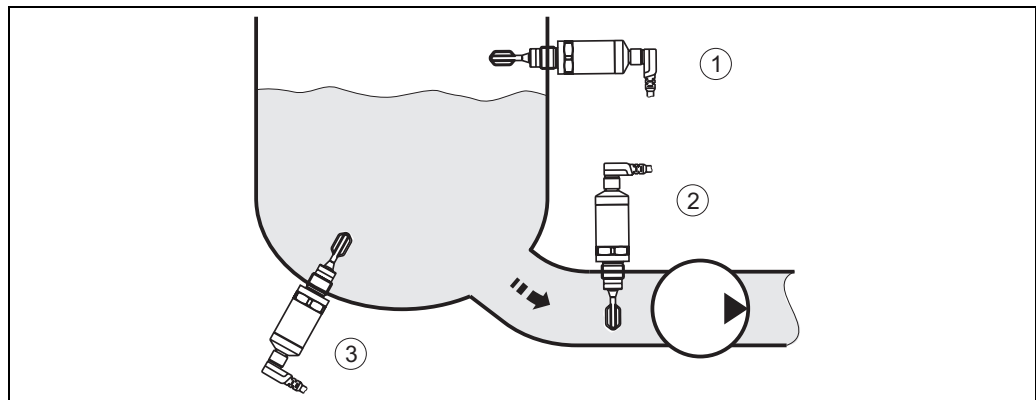Orientation The Liquiphant T FTL20 can be installed in any position in a container or pipe.
The formation of foam does not impair its function.



L00-FTL20xxx-11-05-xx-xx-001

Example 1): Overflow protection or top level detection

Example 2): Dry running protection for pump

Example 3): Lower level detection

Connecting cable	Up to 1000 m with AC/DC-PNP, AS-i to IEC 62 026-2
-------------------------	---

Operating conditions: Environment

Ambient temperature range	-40...+70 °C -25...+70 °C (AS-i)
Ambient temperature limits for 150 °C variant	- Derating from 90.0 °C process temperature: Reduction to max. 50.0 °C ambient - Derating from 90.0 °C process temperature: Reduction to max. 150 mA relay switching capacity
Ambient temperature limits for 100 °C variant	- Derating from 80.0 °C process temperature: Reduction to max. 50.0 °C ambient - Derating from 80.0 °C process temperature: Reduction to max. 150 mA relay switching capacity
Storage temperature	-40...+85 °C
Degree of protection	- IP65 with valve connector - IP66/67 with M 12x1 connector PPSU (plastic)
Shock resistance	to EN 60068-2-27 (30 g)
Vibration resistance	to EN 60068-2-64
Electromagnetic compatibility	Interference emission to EN 61326, Electrical Equipment Class B, interference immunity to EN 61326, Annex A (Industrial) and NAMUR Recommendation NE 21 (EMC). AS-interface to EN 50295.
Overvoltage protection	Overvoltage category III

Operating conditions: Process


Medium temperature range for 150 °C variant	-40...+150 °C, see ambient temperature limits
Medium temperature range for 100 °C variant	-40...+100 °C, see ambient temperature limits
Process pressure	-1...40 bar
State of aggregation	Liquid
Density	> 0.7 g/cm ³ (other density setting on request)
Viscosity	1...10000 cSt
Gas content	Stagnant mineral water
Solids content ø	< 5 mm

Mechanical construction



Note!
All dimensions in mm

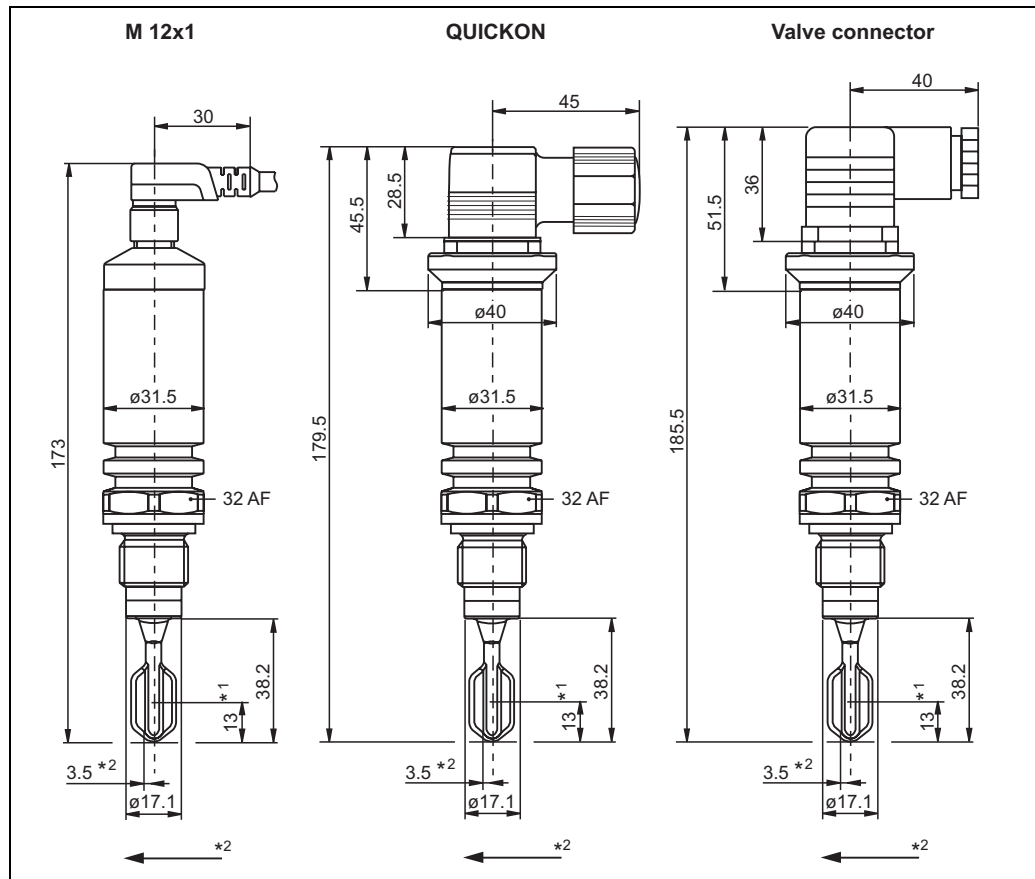Design, dimensions
of the 150 °C variant




L00-FTL20xxx-06-05-xx-en-001

*1 Switch point with vertical installation

*2 Switch point with horizontal installation; the level increases in the direction of the arrow



Switch points at: density 1 / 23 °C / 0 bar




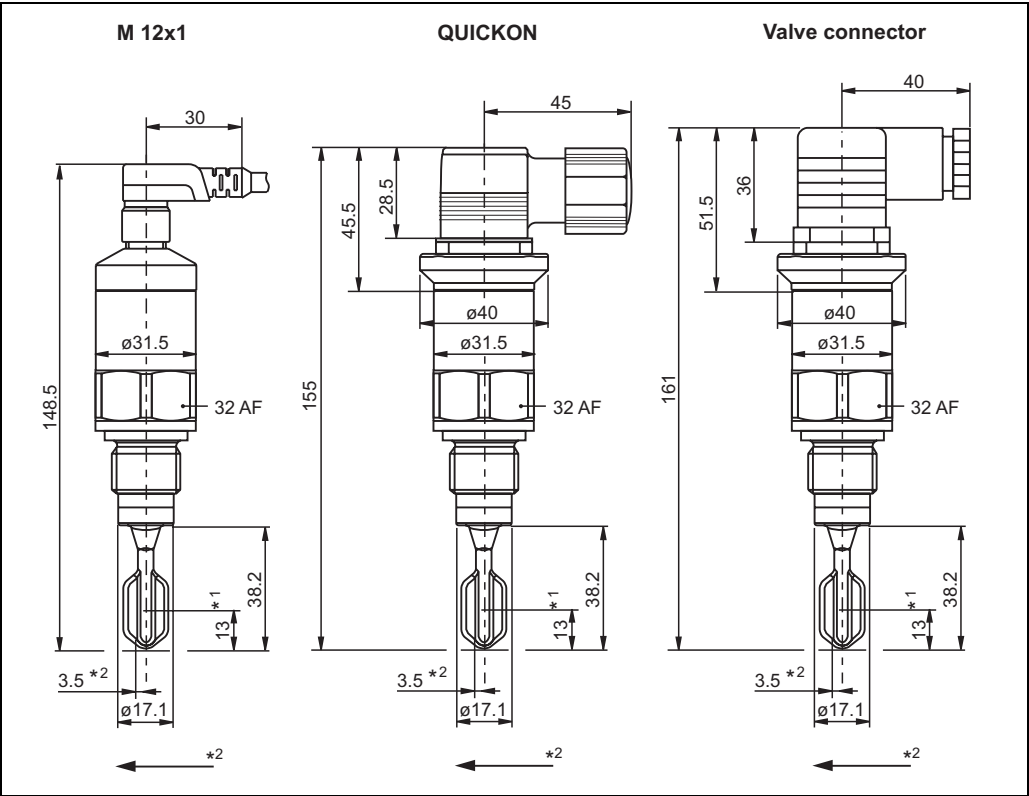
Design, dimensions
of the 100 °C variant



*1 Switch point with vertical installation
*2 Switch point with horizontal installation; the level increases in the direction of the arrow
Switch points at: density 1 / 23 °C / 0 bar

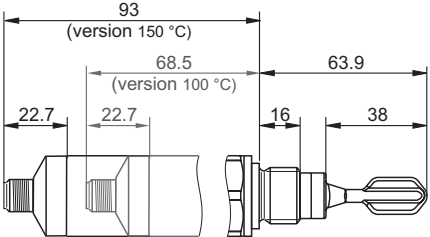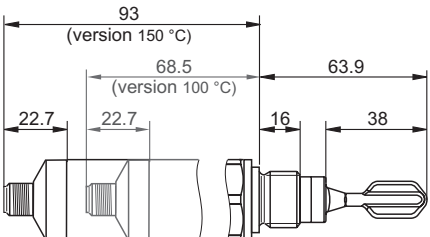Process connections

Process connection / Dimensions	Order code	Accessories (optional)	Pressure Temperature
G ½ A, G ¾ A DIN ISO 228/1 	0 1		max. 40 bar max. 150 °C
G ¾ A DIN ISO 228/1 for flush-mounted installation in welding boss EHEDG with welding boss 52018765 	1	Welding boss (with defined thread start) with silicone O-ring Endress+Hauser 52018765 FDA-listed materials as per 21 CFR Part 175-178	max. 25 bar max. 150 °C max. 40 bar max. 100 °C

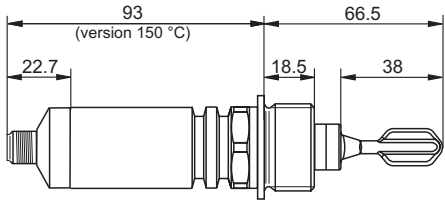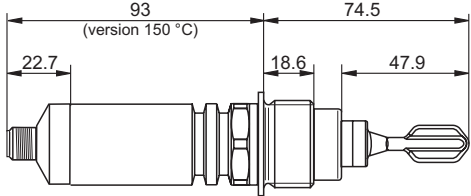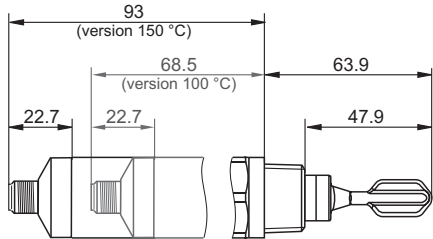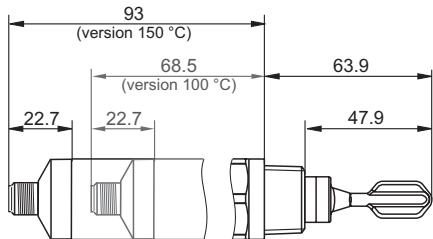Process connection / Dimensions	Order code	Accessories (optional)	Pressure Temperature
G 1 A DIN ISO 228/1  L00-FTL20xxx-06-05-xx-en-010	6		max. 40 bar max. 150 °C
G 1 A DIN ISO 228/1 with sealing surface for flush-mounted installation in welding boss EHEDG with welding boss 52001051 (Seal geometry same as e.g. FTL260)  L00-FTL20xxx-06-05-xx-en-012	7	Welding boss (with defined thread start) with silicone O-ring Endress+Hauser 52001051 FDA-listed materials as per 21 CFR Part 175-178	max. 25 bar max. 150 °C max. 40 bar max. 100 °C
½ NPT ANSI B 1.20.1 R ½ DIN 2999  L00-FTL20xxx-06-05-xx-en-011	2 4		max. 40 bar max. 150 °C
¾ NPT ANSI B 1.20.1 R ¾ DIN 2999  L00-FTL20xxx-06-05-xx-en-011	3 5		max. 40 bar max. 150 °C


Weight (150 °C variant)	Approx. 270 g
Weight (100 °C variant)	Approx. 210 g
Materials	Sensor and housing made of 316L, surface quality Ra < 3.2 µm
Housing	Pipe housing
Terminals	Valve connector, QUICKON, M 12x1

Human interface

Function test with test magnet **Variants AC and DC-PNP:**
On testing, the current state of the electronic switch is reversed.

Variant AS-interface:
On testing, D0 is inverted.

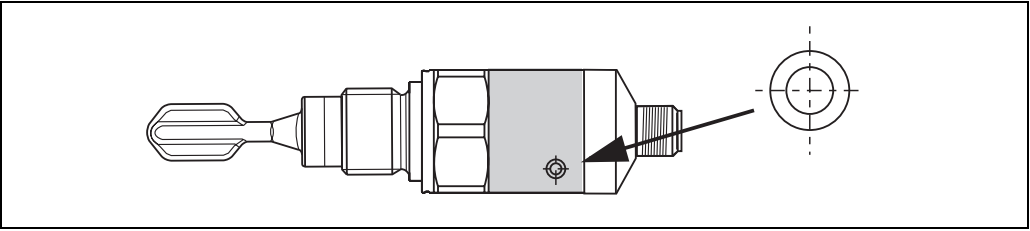Performing test
Hold the test magnet against the mark on the nameplate:




The switching state changes.

L00-FTL20xxx-19-05-xx-xx-001

Light signals

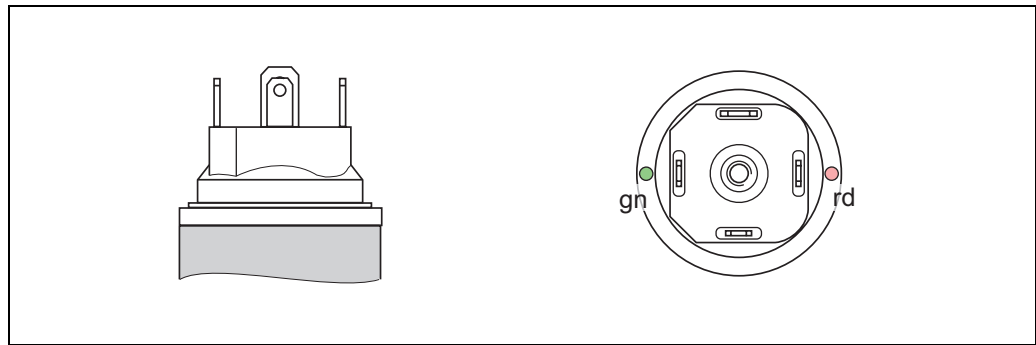Variants AC and DC-PNP with valve connector/QUICKON



100-FTL20Hxx-07-05-xx-xx-001

Green light (gn) lighting:

FTL20 is connected to the power supply and is operational.

Red light (rd) lighting:

Mode of operation MAX (overfill protection): sensor is immersed in liquid.

Mode of operation MIN (dry running protection): sensor is immersed in liquid.

Green light (gn) does not come on

Error:

No power supply.

- Check plug, cable and power supply

Red light (rd) flashing:

Error:

Overload or short-circuit in load circuit.

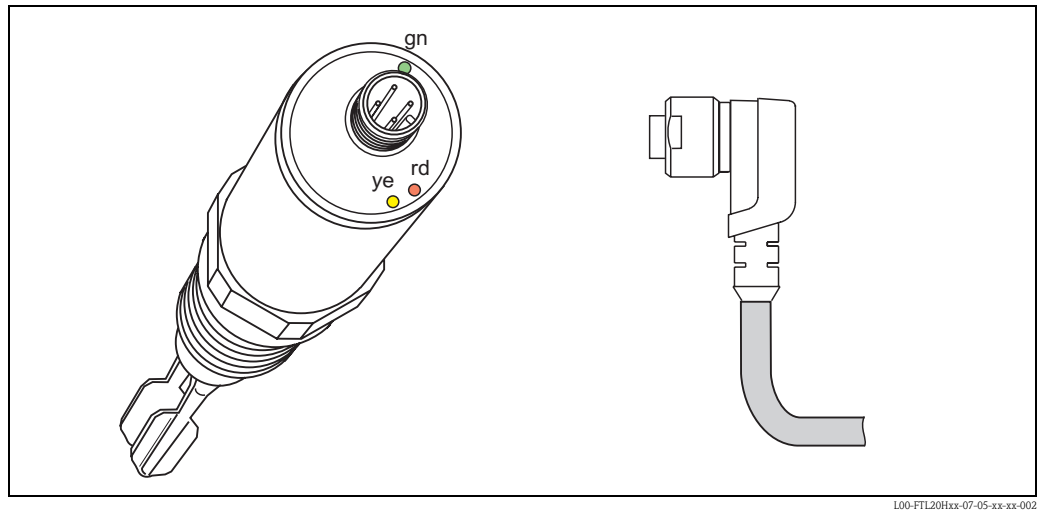
- Rectify the short-circuit
- Reduce maximum load current to below 250 mA

Error:

Internal sensor error or sensor corroded.

- Replace device

Variant AS-interface and DC-PNP with M 12x1 circular connector PPSU



L00-FTL20Hxx-07-05-xx-xx-002

Green light (gn) lighting:

FTL20 is connected to the power supply and is operational.

Yellow light (ye) lighting:

Sensor is immersed in liquid.

Red light (rd) lighting with AS-interface:

Error:

Address 0 set or communication error.

- Carry out addressing process
- Parameterise slave
- Or reduce line length (< 100 m total length)

Red light (rd) lighting with DC-PNP

Error:

Overload or short-circuit in load circuit.

- Rectify the short-circuit
- Reduce maximum load current to below 250 mA

Green light (gn) does not come on

Error:

No power supply.

- Check plug, cable and power supply

Red light (rd) flashing (2 Hz):

Error:

Internal sensor error or sensor corroded.

- Replace device

Certificates and approvals



Note!

The specified certificates and approvals are available on www.endress.com/ftl20.

CE approval

The device is in conformity with the statutory requirements of the EC Directives. Endress+Hauser confirms successful testing of the device by affixing the CE mark.

Sanitary compatibility

EHEDG (see process connections, Page 11),
Approval number: 3119/03/0445

Overfill protection

WHG and leakage

Marine approval

German Lloyd (GL),
Approval number: 42855-02HH

Other standards and guidelines

AS-i profile S-3.A.1 as per EN 50295 (limit switch)

Ordering information

Liquiphant T FTL20

10		Approval *					
		0	Non-hazardous area,		WHG, leakage detection		
		3	CSA General Purpose,		CSA C US		
		9	Special version				
20		Process connection					
		0	Thread ISO228	G ½ A,	316L	Installation in accessory: welding boss	
		1	Thread ISO228	G ¾ A,	316L		
		6	Thread ISO228	G 1 A,	316L		
		7	Thread ISO228	G 1 A,	316L		
		2	Thread ANSI	NPT ½,	316L		
		3	Thread ANSI	NPT ¾,	316L		
		4	Thread DIN2999	R ½,	316L		
		5	Thread DIN2999	R ¾,	316L		
		9	Special version				
30		Switch output					
		1	2-wire	19...253 V AC			
		2	3-wire, PNP	10... 35 V DC			
		3	AS-i bus				
		9	Special version				
40		Application; Cable entry					
		B	150 °C,	Plug	Pg 11	ISO4400	IP65
		C	150 °C,	Plug	NPT ½	ISO4400	IP65
		D	150 °C,	Plug	M 12		IP66/67
		E	150 °C,	Plug	QUICKON		IP65
		0	100 °C,	Plug	Pg 11	ISO4400	IP65
		4	100 °C,	Plug	NPT ½	ISO4400	IP65
		5	100 °C,	Plug	M 12		IP66/67
		6	100 °C,	Plug	QUICKON		IP65
		9	Special version				
FTL20						Order code	

* The specified certificates and approvals are available on www.endress.com/ftl20.

17

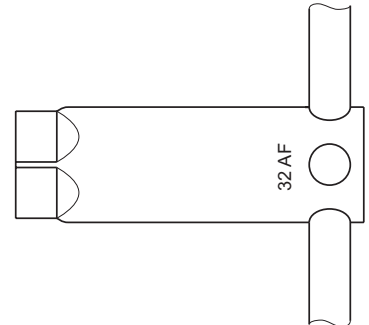


Note!
All dimensions in mm

Socket wrench

Order number: 52010156

Socket wrench AF 32



L00-FTL20xxx-00-05-xx-en-001

Welding boss G $\frac{3}{4}$

Order number: 52018765

- For flush-mounted installation and sealing
- with defined thread start
- Sensor cannot be aligned


Material: corrosion-resistant steel
1.4435 (AISI 316L)

Weight: 0.13 kg

Seal: silicone O-ring

Order number: 52021717 (set)

FDA-listed materials as per
21 CFR Part 175-178



L00-FTL5xxxx-06-05-xx-xx-019

max. 25 bar
max. 150 °C

max. 40 bar
max. 100 °C

Welding boss G 1

Order number: 52001051

- For flush-mounted installation and sealing
- with defined thread start
- Sensor cannot be aligned


Material: corrosion-resistant steel
1.4435 (AISI 316L)

Weight: 0.19 kg

Seal: silicone O-ring

Order number: 52001386

FDA-listed materials as per
21 CFR Part 175-178



L00-FTL5xxxx-06-05-xx-xx-020

max. 25 bar
max. 150 °C

max. 40 bar
max. 100 °C

Cable

Order number: 52010285

4 x 0.34 M 12 elbowed


Cable: PVC (grey) 5 m length

Body: PUR (blue)

Coupling nut: Cu Sn/Ni

Protection: IP67

Temperature range: -25 °C to +70 °C



L00-FTL20Hxx-07-05-xx-xx-004

Supplementary documentation

Operating Instructions

- FTL20
KA213F/00
Order number: 52019486
- Welding boss G $\frac{3}{4}$
KA219F/00
Order number: 52020163

Certificates

- Liquiphant FTL20, FTL20H
Allgemeine bauaufsichtliche Zulassung Z-65.11-311
ZE247F/00
- Liquiphant FTL20, FTL20H (Leakage)
Allgemeine bauaufsichtliche Zulassung Z-65.40-312
ZE248F/00
- Liquiphant FTL20, FTL20H
Number of the Certification Document 37102
ZE249F/00
- Liquiphant FTL20, FTL20H
Certificate of Compliance No. 1238461
ZE250F/00



Note!

The specified certificates and approvals are available on www.endress.com/ftl20.

International Head Quarter

Endress+Hauser
GmbH+Co. KG
Instruments International
Colmarer Str. 6
79576 Weil am Rhein
Deutschland

Tel. +49 76 21 9 75 02
Fax +49 76 21 9 75 34 5
www.endress.com
info@ii.endress.com

Endress+Hauser 

People for Process Automation