



Level



Pressure



Flow



Temperature



Liquid
Analysis



Registration



Systems
Components



Services




Solutions

Technical Information

Soliphant T FTM20, FTM21

Level limit switch

Robust vibration limit switch for bulk solids,
also for dust incensive hazard areas

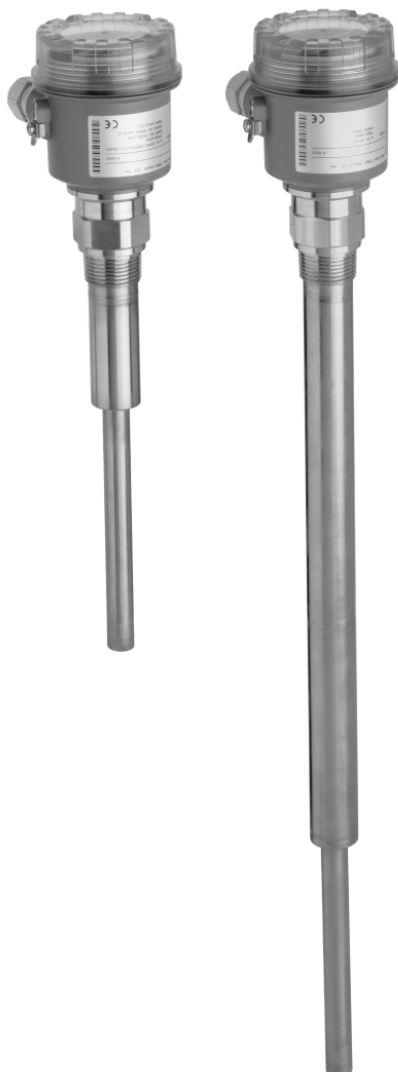

Application

Soliphant T is a robust level limit switch for silos with fine-grained or coarse-grained, non-fluidised bulk solids. The various designs means the device has a wide range of applications. Certificates are also available for use in dust incensive hazard areas.

FTM20 compact design (250 mm) as vibrating rod for installation in any direction

FTM21 vibrating rod with extension pipe (500 mm/1000 mm/1500 mm/20 in/40 in/60 in) for installation in any direction

Typical applications: cereals, coffee beans, sugar, animal feed, rice, detergents, dye powder, chalk, gypsum, cement, sand, plastic granules

Your benefits

- No calibration: easy commissioning (plug and play)
- Insensitive to build-up: maintenance-free operation
- No mechanically moving parts: no wear, long operating life
- Sensor material 316L: hardly any abrasion even with building materials
- F16 plastic housing with cover with sight glass: switch status visible from outside
- F18 aluminium housing also available
- Insensitive to external vibration and flow noises
- Also available with explosion protection ATEX II 1/3 D, FM or CSA approval

Table of contents


Function and system design	3
Measuring principle	3
Measuring system	3
Cable specifications	4
Cable entries	4
Input	4
Measured variable	4
Measuring range (application)	4
Input signal	4
Measuring frequency	4
Output	4
Galvanic isolation	4
Switch behaviour	4
Power-on behaviour	4
Fail-safe mode	4
Switching delay	4
Ex specifications	4
FEM22 electronic insert (DC PNP)	5
Power supply	5
Electrical connection	5
Output signal	5
Signal on alarm	5
Connectable load	5
FEM24 electronic insert (AC/DC with relay output) ..	6
Power supply	6
Electrical connection	6
Output signal	6
Signal on alarm	6
Connectable load	6
Operating conditions	7
Installation instructions	7
Environment	7
Ambient temperature range	7
Storage temperature	7
Climate class	7
Degree of protection	7
Vibration resistance	7
Electrical safety	7
Electromagnetic compatibility	7
Process	8
Environment	8
Thermal shock resistance	8
Limiting medium pressure range	8
State of aggregation	8
Grain size	8
Bulk density	8
Lateral load	8

Mechanical construction	9
Design, dimensions	9
Weight	10
Material	10
Human interface	10
Display elements	10
Operating elements of electronic inserts FEM22 and FEM24 ...	11
Sediment detection	11
Certificates and approvals	12
CE mark, declaration of conformity	12
Ex approval	12
Type of protection	12
Other standards and guidelines	12
Ordering information	13
Soliphant T FTM20	13
Soliphant T FTM21	14
Accessories	15
Sliding sleeve	15
Spare parts	15
Supplementary documentation	16
Operating Instructions	16
Certificates	16

Function and system design

Measuring principle

A piezoelectric drive excites the vibrating rod of Soliphant T FTM20, FTM21 to its resonance frequency. If medium covers the vibrating rod, the rod's vibrating amplitude changes (the vibration is damped). Soliphant's electronics compare the actual amplitude with a target value and indicates whether the vibrating rod is vibrating freely or whether it is covered by medium.

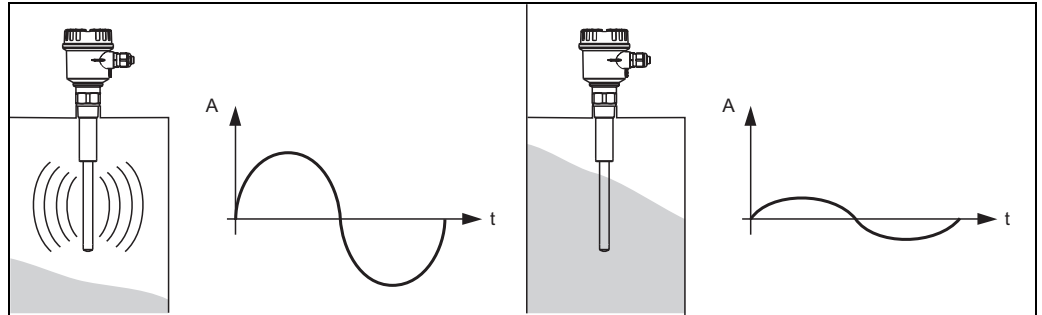

L00-FTM2xxxx-15-06-xx-xx-001


A = amplitude

Measuring system

Soliphant T is a compact electronic switch.

Thus, the entire measuring system only consists of:

- Soliphant T FTM20 or FTM21 with FEM22 or FEM24 electronic insert
- a supply point and
- the connected control systems, switching units, signalling systems (e.g. lamps, horns, PCS, PLC, etc.)

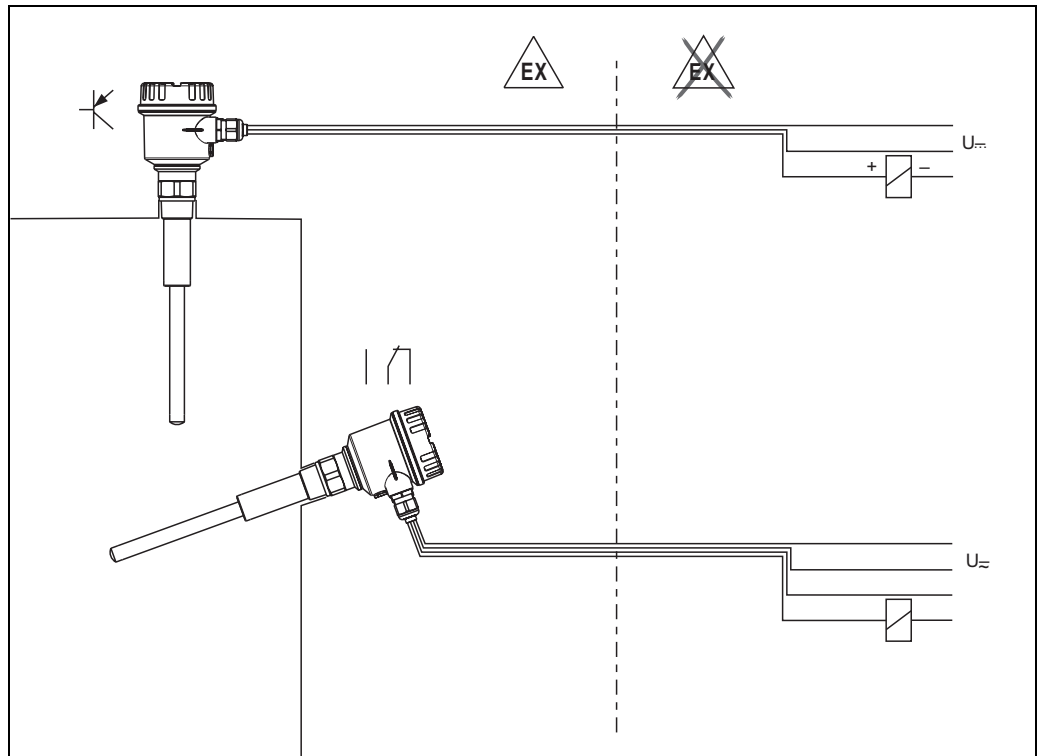

L00-FTM2xxxx-14-06-xx-xx-001

Cable specifications

Use a shielded cable in the event of strong electromagnetic radiation.

Immunity to temperature change of connecting cable

The connecting cables must withstand the ambient temperature +15 K.

Cable entries	M20x1.5 (cable gland); NPT ½; G ½
----------------------	-----------------------------------

Input

Measured variable	Level (according to the mounting location and the overall length)
Measuring range (application)	The measuring range depends on the mounting location of Soliphant T and the length of the pipe extension selected. The pipe extension is available in the following lengths: 500 mm, 1000 mm, 1500 mm, 20 in, 40 in, 60 in.
Input signal	Probes covered => small amplitude Probe not covered => large amplitude
Measuring frequency	700...800 Hz


Output

Galvanic isolation	FEM22: Between sensor and power supply FEM24: Between sensor, power supply and load
Switch behaviour	Binary
Power-on behaviour	When switching on the power supply the output is set to "signal on alarm". After a maximum of 3 s it switches to the correct output signal.
Fail-safe mode	Minimum/maximum quiescent current safety can be switched at electronic insert Max. = maximum safety: When the vibrating rod is covered, the output switches in the direction of the signal on alarm Used for overfill protection for example Min. = minimum safety: When the vibrating rod becomes exposed, the output switches in the direction of the signal on alarm Used for empty running protection for example
Switching delay	0.5 s when the sensor is covered 1 s when the sensor is exposed
Ex specifications	FEM22, FEM24: – Explosion protection for explosive dust-air mixtures: Dust-Ex, DIP

FEM22 electronic insert (DC PNP)

Power supply	DC voltage 10 V...45 V Ripple max. 5 V, 0...400 Hz Current consumption max. 15 mA Power consumption max. 0.68 W Reverse polarity protection Separation voltage: 2.2 kV FEM22 overvoltage protection: overvoltage category III
--------------	---

Electrical connection	Three-wire direct current connection Preferred in conjunction with programmable logic controllers (PLC), DI modules as per EN 61131-2. Positive signal at electronics switch output (PNP); Output blocked at level limit.
-----------------------	---

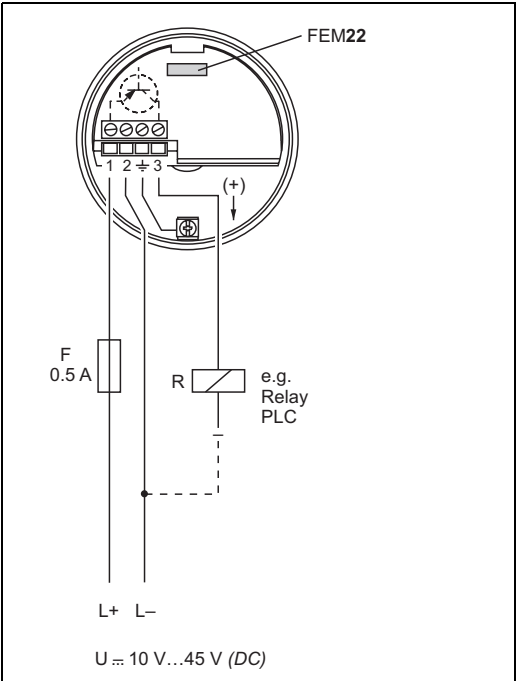

L00-FTM2xxxx-04-05-xx-en-002

Output signal	
IL	= Load current (switched through)
< 100 µA	= Residual current (blocked)
	= Lit
	= Not lit

L00-FTL2xxxx-07-05-xx-xx-000

Fail-safe mode	Level	Output signal	LEDs green yellow
Max.		$L+ \xrightarrow{I_L} +$ 1 3	 
		$1 \xrightarrow{< 100 \mu A} 3$	 
Min.		$L+ \xrightarrow{I_L} +$ 1 3	 
		$1 \xrightarrow{< 100 \mu A} 3$	 

L00-FTM2xxxx-04-05-xx-xx-003

Signal on alarm	Output signal on power failure or in the event of device failure: < 100 µA
-----------------	--

Connectable load	■ Load switched via transistor and separate PNP connection ■ Load current: max. 45 V (cyclical overload and short-circuit protection), continuous max. 350 mA ■ Residual current: < 100 µA (for blocked transistor) ■ Capacitive load: max. 0.5 µF for 45 V, max. 1.0 µF for 24 V ■ Residual voltage: < 3 V (for transistor switched through)
------------------	---

FEM24 electronic insert (AC/DC with relay output)

Power supply

Alternating voltage 19 V...253 V, 50/60 Hz or DC voltage 19 V...55 V
 Power consumption max. 1.3 W
 Reverse polarity protection
 Separation voltage: 2.2 kV
 FEM24 overvoltage protection: overvoltage category III

Electrical connection

Universal current connection with relay output

Power supply:
 Please note the different voltage ranges
 for AC and DC.

Output:

When connecting a device with
 high inductance, provide a spark arrester
 to protect the relay contact.

A fine-wire fuse (depending on the
 load connected) protects the relay
 contact in the event of a short-circuit.


Both relay contacts switch simultaneously.
 DPDT (double pole double throw)

* When jumpered, the
 relay output works with NPN logic.

** See below "Connectable load"



Note!
 Please note the different voltage ranges
 for direct and alternating current.

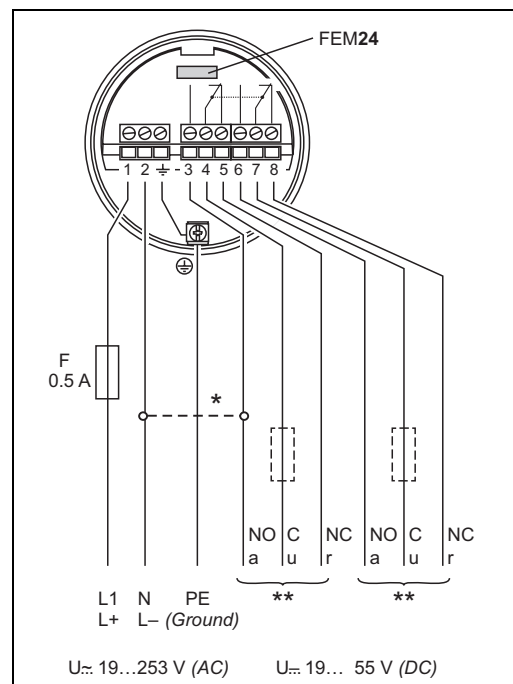

L00-FTM2xxxx-04-05-xx-xx-004

Output signal

= Relay energised
 = Relay de-energised
 = Lit
 = Not lit

L00-FTL2xxxx-07-05-xx-xx-001

Fail-safe mode	Level	Output signal	LEDs green yellow
Max.			
Min.			

L00-FTM2xxxx-04-05-xx-xx-005

Signal on alarm

Output signal in event of power failure: relay de-energised

Connectable load

- Loads switched via 2 floating change-over contacts.
- I~ max. 6 A, U~ max. 253 V; P~ max. 1500 VA, $\cos \varphi = 1$, P~ max. 750 VA, $\cos \varphi > 0.7$;
- I- max. 6 A to 30 V, I- max. 0.2 A to 125 V.
- The following applies when connecting a functional extra-low voltage circuit with double insulation as per IEC 1010: Sum of voltages of relay output and power supply max. 300 V


Operating conditions

Installation instructions

Mounting location

e.g. storage or buffer container

Orientation

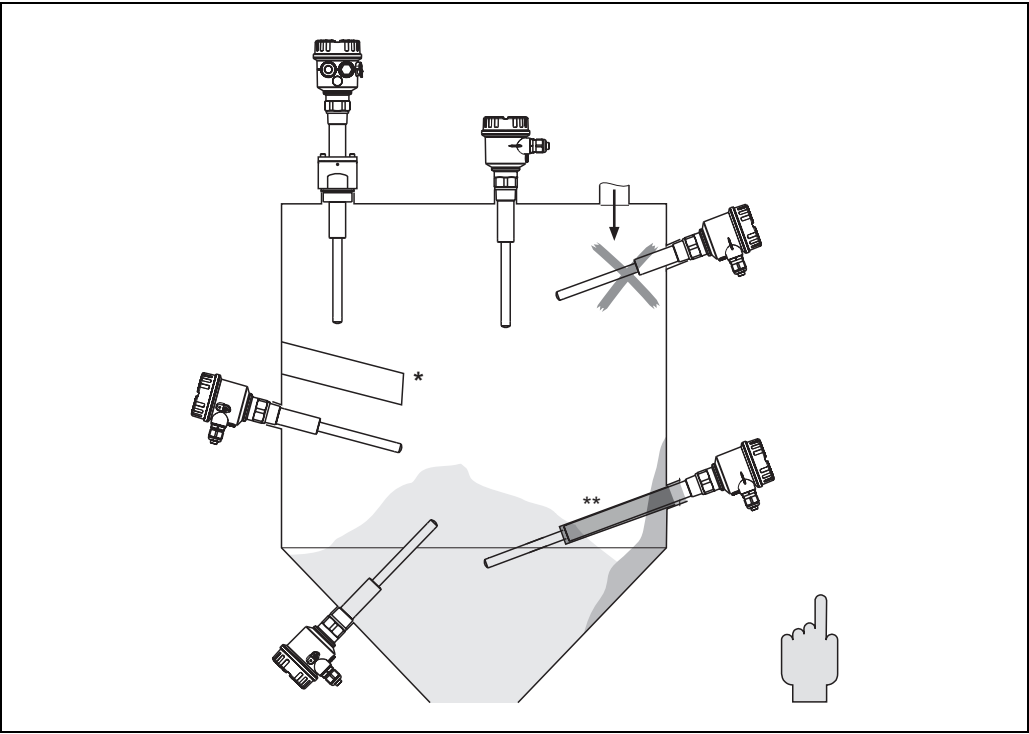

Horizontal installation/vertical installation
* With protective cover (to be provided by customer)
** With protecting tube (to be provided by customer)


L00-FTM20xxx-11-05-xx-xx-000

Environment

Ambient temperature range	−40...70 °C
Storage temperature	−40...85 °C
Climate class	Climatic protection as per DIN IEC 68 Part 2-38, Fig. 2a
Degree of protection	IP66/IP67, NEMA4X
Vibration resistance	DIN 60068-2-27 / IEC 68-2-27: shock 30 g; vibration 0.01 g ² /Hz
Electrical safety	IEC 61010, CSA 1010.1-92, FM3600
Electromagnetic compatibility	Interference emission to EN 61326, Electrical Equipment Class B Interference immunity to EN 61326, Annex A (Industrial)

Process

Environment Permitted ambient temperature T_a at housing depending on the medium temperature T_p in the container:

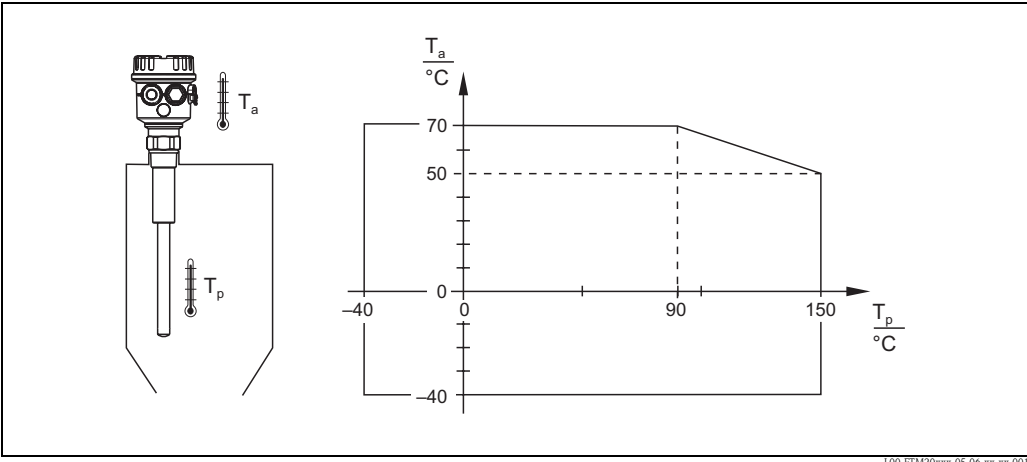

$x\text{ }^{\circ}\text{C} = (1.8\text{ }x + 32)\text{ }^{\circ}\text{F}$

L00-FTM20xxx-05-06-xx-xx-001

Thermal shock resistance Maximum 120 K

Limiting medium pressure range -1...25 bar

Maximum Working Pressure (MWP)
25 bar


Burst pressure
100 bar

State of aggregation Solids

Grain size $\leq 25\text{ mm}$

Bulk density $\geq 200\text{ g/l}$, not fluidised

Lateral load

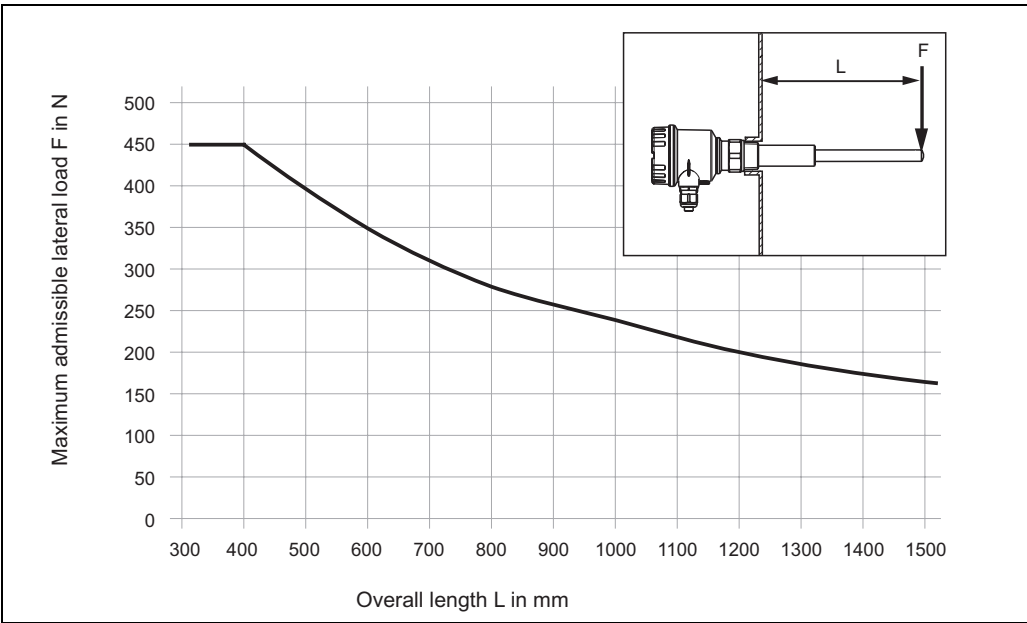

$100\text{ mm} = 3.94\text{ in}$

L00-FTM2xxxx-05-06-xx-en-001


Mechanical construction



Note!
All dimensions in mm! (100 mm = 3.94 in)


Design, dimensions

Compact version

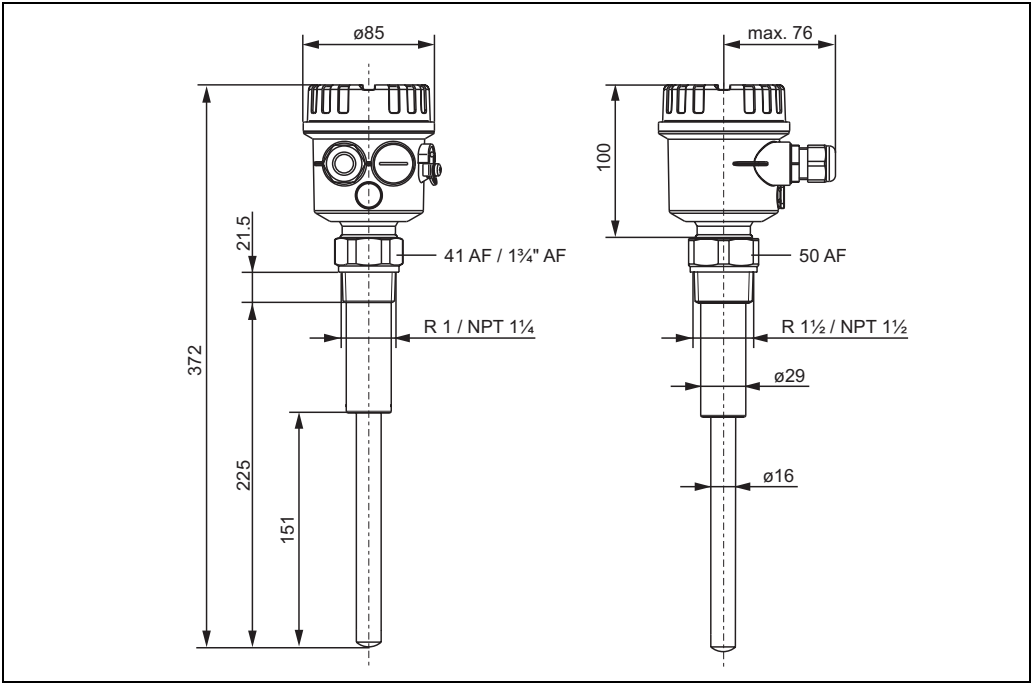

L00-FTM20xxx-06-05-xx-en-001

Pipe extension

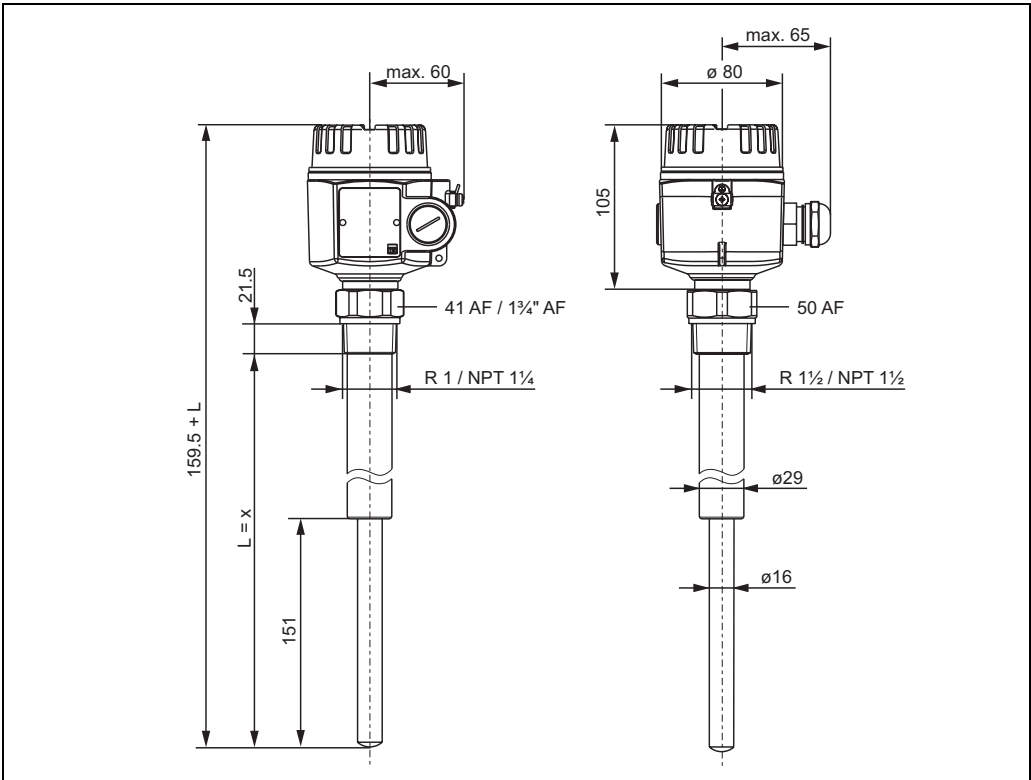

L00-FTM20xxx-06-05-xx-en-000

x = 500 mm; 1000 mm; 1500 mm; 20 in; 40 in; 60 in

Weight	FTM20/FTM21 with F16 housing, FEM24 and R 1 thread:
	Compact = approx. 1.0 kg 500 mm = approx. 1.3 kg 1000 mm = approx. 2.0 kg 1500 mm = approx. 2.6 kg
Material	F16 housing:
	PTB-FR, cover with sight glass made of PA12, EPDM cover seal
	F18 housing:
	Aluminium EN-AC-AlSi10Mg, plastic-coated EPDM cover seal
	Process connections:
	■ R1; R1½ (316L, DIN 2999)
	■ NPT 1¼ - 11½; NPT 1½ - 11½ (316L, ANSI B 1.20.1)
	Sensor:
	316L

Human interface


Display elements



Note!
The switch settings in the following graphics are in the as-delivered state.

FEM22


- One green LED: operation
- One yellow LED: electronic switch closed

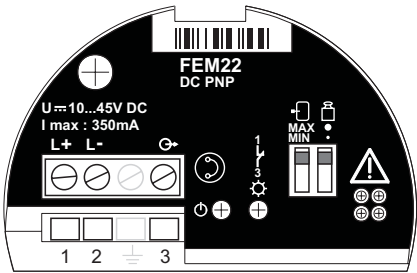

L00-FEM22xxx-07-05-xx-xx-001


FEM24

- One green LED: operation
- One yellow LED: contact closed (relay energised or fed with current)

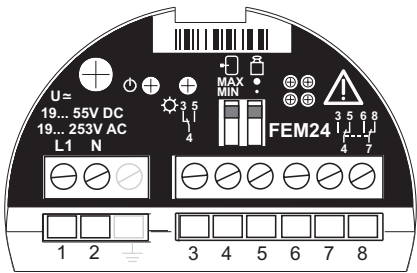

L00-FEM24xxx-07-05-xx-xx-002

Operating elements of
electronic inserts
FEM22 and FEM24




L00-FTM2xxxx-19-05-xx-xx-002

- One switch for safety mode
- MAX Overfill protection
MIN Dry running protection

- One switch for bulk density/density setting
- 400 g/l (high bulk density)
 - 200 g/l (low bulk density)

Sediment detection

Detection of solids under water

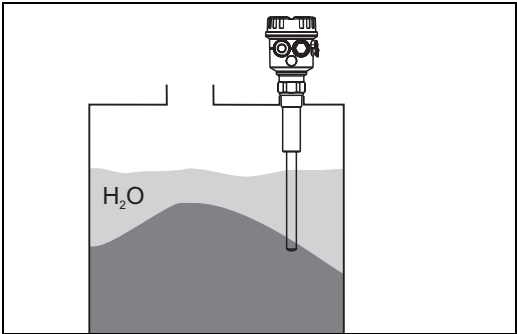

L00-FTM2xxxx-19-05-xx-xx-001

The system does not detect coverage by liquids similar to water.

Certificates and approvals

CE mark, declaration of conformity	The instrument is designed to meet state-of-the-art safety requirements, has been tested and left the factory in a condition in which it is safe to operate. The instrument complies with the applicable standards and regulations as listed in the EC declaration of conformity and thus complies with the statutory requirements of the EG directives. Endress+Hauser confirms the successful testing of the instrument by affixing to it the CE mark.
Ex approval	Your Endress+Hauser sales centre can provide you with information on the Ex versions which can currently be delivered. All explosion protection data are given in a separate documentation (see "Supplementary Documentation") which is available upon request. Copies of certificates available upon request.
Type of protection	See "Ordering information" as of Page 13 and "Supplementary documentation" on Page 16.
Other standards and guidelines	Other standards and guidelines that were taken into consideration in designing and developing Soliphant T FTM20, FTM21: ■ Low Voltage Directive (73/23/EEC) ■ DIN EN 61010 Part 1, 2001 Protection Measures for Electrical Equipment for Measurement, Control, Regulation and Laboratory Procedures Part 1: General requirements ■ EN 61326 Electrical Equipment for Measurement, Control and Laboratory Use EMC requirements

Ordering information

Soliphant T FTM20

10	Approval				
	A	Non-hazardous area			
	C	CSA General Purpose, CSA C US			
	D	CSA DIP+FM DIP			
	Y	Special version			
	4	ATEX II 1/3 D			
20	Process connection				
	A	Thread, DIN2999	R1,	316L	
	G	Thread, DIN2999	R1½,	316L	
	M	Thread, ANSI	NPT1¼,	316L	
	N	Thread, ANSI	NPT1½,	316L	
	Y	Special version			
30	Electronics; output				
	2	FEM22:	3-wire PNP,	10... 45 V DC	
	4	FEM24:	Relay DPDT,	19...253 V AC / 55 V DC	
	8	FEM20B	ASI Bus		
	9	Special version			
40	Housing; cable entry				
	2	F16	Polyester	IP66/IP67,	NEMA4X M20 gland
	3	F16	Polyester	IP66/IP67,	NEMA4X Thread, NPT½
	4	F16	Polyester	IP66/IP67,	NEMA4X Thread, G½
	5	F18	Aluminium	IP66/IP67,	NEMA4X M20 gland
	6	F18	Aluminium	IP66/IP67,	NEMA4X Thread, NPT¾
	7	F18	Aluminium	IP66/IP67,	NEMA4X Thread, G½
	9	Special version			
50	Additional fittings				
	A	Basic version			
	Y	Special version			
FTM20					Complete product designation

Soliphant T FTM21

10	Approval					
	A	Non-hazardous area				
	C	CSA General Purpose, CSA C US				
	D	CSA DIP+FM DIP				
	Y	Special version				
	4	ATEX II 1/3 D				
20	Process connection					
	A	Thread, DIN2999	R1,	316L		
	G	Thread, DIN2999	R1½,	316L		
	M	Thread, ANSI	NPT1¼,	316L		
	N	Thread, ANSI	NPT1½,	316L		
	Y	Special version				
25	Sensor length					
	2	500 mm				
	3	1000 mm				
	4	1500 mm				
	6	20 inch				
	7	40 inch				
	8	60 inch				
	9	Special version				
30	Electronics; output					
	2	FEM22:	3-wire PNP,	10...45 V DC		
	4	FEM24:	Relay DPDT,	19...253 V AC / 55 V DC		
	8	FEM20B	ASI Bus			
	9	Special version				
40	Housing; cable entry					
	2	F16	Polyester	IP66/IP67,	NEMA4X	M20 gland
	3	F16	Polyester	IP66/IP67,	NEMA4X	Thread, NPT½
	4	F16	Polyester	IP66/IP67,	NEMA4X	Thread, G½
	5	F18	Aluminium	IP66/IP67,	NEMA4X	M20 gland
	6	F18	Aluminium	IP66/IP67,	NEMA4X	Thread, NPT¾
	7	F18	Aluminium	IP66/IP67,	NEMA4X	Thread, G½
	9	Special version				
50	Additional fittings					
	A	Basic version				
	Y	Special version				
FTM21						Complete product designation

Accessories


Sliding sleeve

For pressurised container

- R 1½
DIN 2999
52023312
- NPT 1½ - 11½
ANSI B 1.20.1
52025090



Note!
Suitable for multiple switch-point configurations!

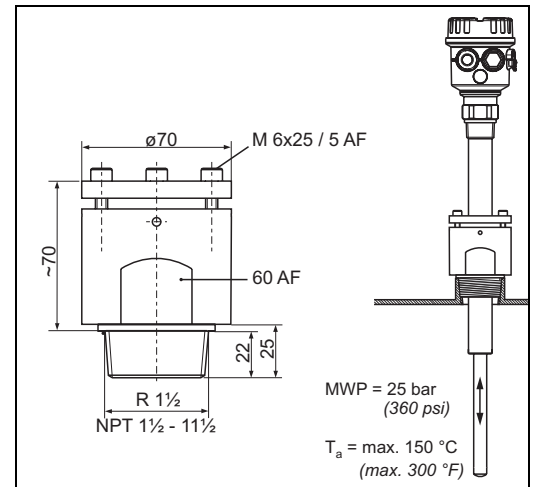


L00-FTM2xxxx-03-05-xx-en-001

For unpressurised container, IP65

- R 1½
DIN 2999
52023313
- NPT 1½ - 11½
ANSI B 1.20.1
52024578



Note!
Only suitable for one-time switch-point configuration!

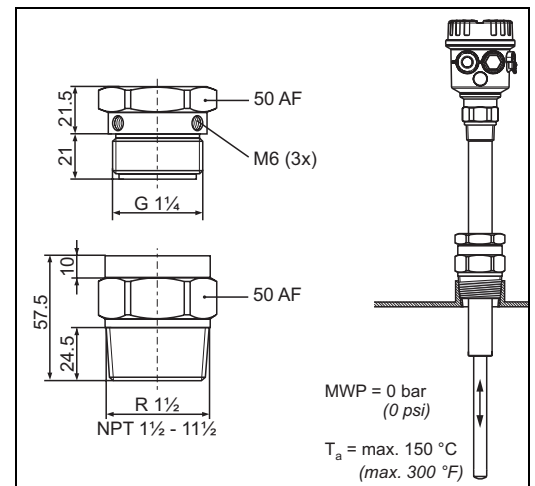

L00-FTM2xxxx-03-05-xx-en-002

Spare parts

- FEM22 electronic insert
52025688
- FEM24 electronic insert
52025691
- Cover for polyester housing (F16), transparent plastic with seal
52025790
- Cover for aluminium housing (F18), aluminium with seal
52005910
- Cover for aluminium housing (F18), aluminium with glass insert and seal (not for EEx d)
52027693

Supplementary documentation

Operating Instructions

- Soliphant T FTM20, FTM21
KA227F/00/a6

Certificates

- ATEX II 1/3 D T +12 K
XA300F/00/a3

International Head Quarter

Endress+Hauser
GmbH+Co. KG
Instruments International
Colmarer Str. 6
79576 Weil am Rhein
Deutschland

Tel. +49 76 21 9 75 02
Fax +49 76 21 9 75 34 5
www.endress.com
info@ii.endress.com

Endress+Hauser 

People for Process Automation