

Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

► Extract from the online catalog



Y-distributor/connector M12, with female connector M12, 3-pos. distributor + PE

The illustration shows a 5-position version

Order No.	1683455
Ord designation	SAC-3P-M12Y/2XM12FS PE
EAN	4017918166922
Pack	5 Pcs.
Customs tariff	85366990
Catalog page information	Page 110 (PC-2005)

► Technical data

General data

Nominal current I_N	4 A
Nominal voltage U_N	24 V AC (In acc. with DIN VDE 0110)
Nominal voltage U_N	24 V DC (In acc. with DIN VDE 0110)
Rated voltage	24 V
Number of positions	3
Contact resistance	5 mOhm
Ambient temperature (operation)	-25 °C ... 90 °C




General characteristics


Insulating material	TPU
Material contact surface	Ni/Au
Material contact	CuSn
Degree of protection	IP67
Contact resistance	5 mOhm
Insulation resistance	1000000000

► Drawings


Dimensioned drawing

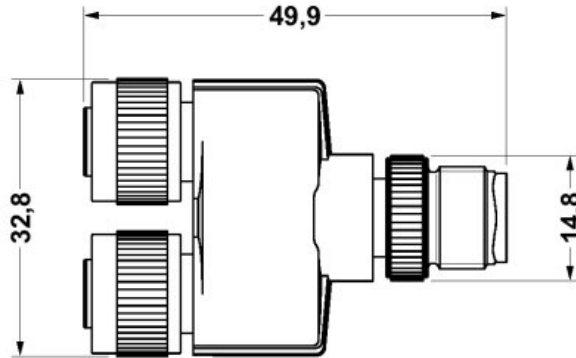

Circuit diagram

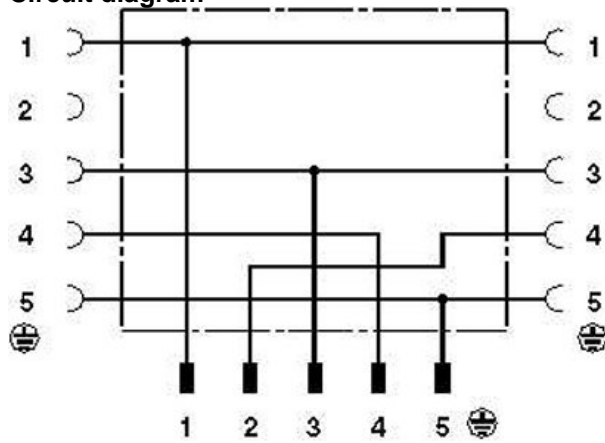

Schematic diagram

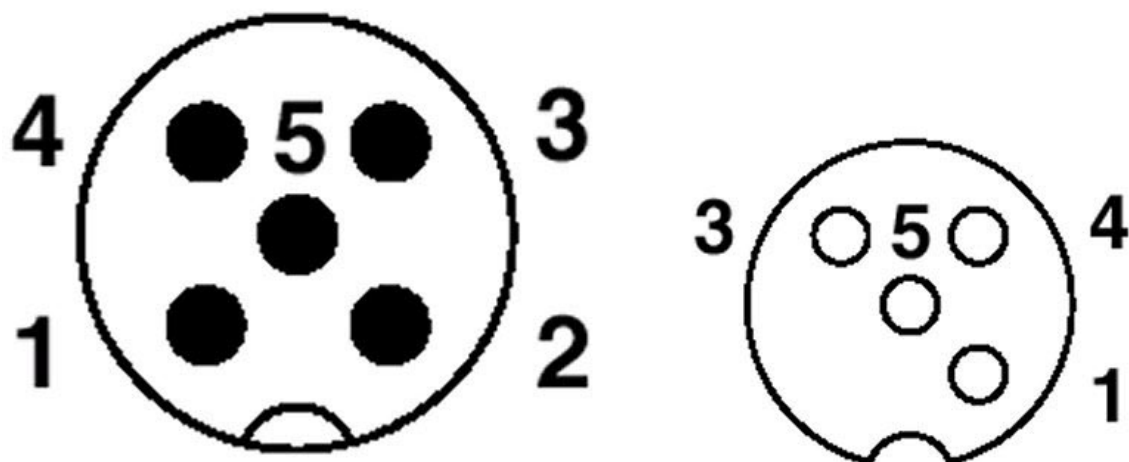

► Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>
Phoenix Contact
Technical modifications reserved;